



ETC130-GB-ASC

Inground Luminaires

1/7



we-ef

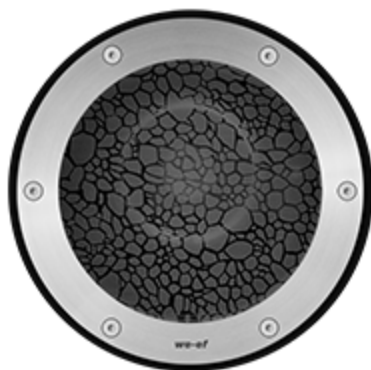

Description

IP67. Inground uplight. Suitable for flush installation in concrete or earth. Offset gimbal mounted lamp module, with lockable aiming, 30° vertical tilt, and 360° horizontal rotation. Special effects can be realized with linear lens, flood lens, or color filters. ASC Anti Slip Coating.

ETC130-GB-ASC

Inground Luminaires

2/7



we-ef

Specifications

Material Specification

Body:	Luminaire body constructed of deep drawn stainless steel. Outer housing composite material.
Lens:	5/8 in thick Antislip Coating ASC tempered glass lens (Slip Resistance Class R10), max load 5 tonnes
Colours:	 Stainless Steel
Gasket:	Silicone rubber gasket
Fasteners:	PCS polymer coated stainless steel
Ingress protection:	IP67
Impact protection:	IK10+
Corrosion protection:	5CE
Mounting:	Suitable for flush installation in concrete or earth. Suitable for walk-over and drive-over applications. Suitable Proper drainage and foundation support must be provided.
Listings:	UL, c UL listed. Suitable for wet locations.

Electrical Specification

Power supply:	Integral [ECG] electronic MH ballst for 120 or 277 volt supply. Specify voltage.
Termination:	Factory sealed termination chamber
Cable:	3 feet of flexible 18/3 cable

Ambient Temperature

Ta less than 25 deg. C

ETC130-GB-ASC

Inground Luminaires

3/7



Choices

Light Distributions	Lumens	Wattages	Colour Temperatures	Colours
 symmetric, medium beam [M]	1650	20	 3000K	 Stainless Steel
 symmetric, very narrow beam [VN]	3000	35		

ETC130-GB-ASC

Inground Luminaires

4/7



Configurations

Light Distributions		Part ID	Light Source	Lumen	Gear	Weight	Link
	symmetric, very narrow beam [VN]	611-3171	CMH22/ Tm / T3.5/ PGJ5 base	1650	electronic gear	16.00	
		611-3173	CMH39/ Tm/ T3.5/ PGJ-5 base	3000	electronic gear	16.00	

ETC130-GB-ASC

Inground Luminaires


5/7



Configurations

Light Distributions	Part ID	Light Source	Lumen	Gear	Weight	Link
	611-3172	CMH39/ Tm/ T3.5/ PGJ-5 base	3000	electronic gear	16.00	
	611-3170	CMH22/ Tm / T3.5/ PGJ5 base	1650	electronic gear	16.00	

Related Families / ETC100-GB ASC

Family		Dimensions	Wattage	Lumen	Links	
					Links	Download Data Sheet
ETC120-GB LED ASC		6.3	6 W	738		
ETC130-GB LED ASC		9.84	18 W	2217		
ETC140-GB LED ASC		11.81	24 W	3228		

ETC130-GB-ASC

Inground Luminaires


6/7



Optical Accessories


Flood lens

	C1
611-8166 Flood lens IO-360	3.86



Linear spread lens

	C1
611-8165 Linear spread lens IO-180	3.86



Electrical Accessories

ETC130-GB-ASC

Inground Luminaires

7/7



Sealable junction box

	C1	M1	M2
■ 697-8072 Sealable junction box SJB 130	5.75	Ø 0.39	Ø 0.47 - 0.75

