



IES INDOOR REPORT

PHOTOMETRIC FILENAME : 6CR-TL-P28-8TW-XXX-POE-OW-WH-XX_4000K.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] GEN FROM BALLABS TEST NO. 20685.0

[TESTLAB] BUILDING ACOUSTICS & LIGHTING LABORATORIES, INC

[ISSUE DATE] 28-JAN-2021

[MANUFAC] WILLIAMS INDOOR

[OTHER] H.E. WILLIAMS, INC - CARTHAGE, MO

[LUMINAIRE] 1 BRIDGELUX V13 LED 6" ROUND SURFACE CYLINDER

[MORE] OPEN SEMI-SPEC SPUN ALUMINUM REFLECTOR (WIDE)

[LUMCAT] 6CR-TL-P28-8TW-xxx-POE-OW-WH-xx_4000k

[LAMPCAT] V13 BXRE-35E2000

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2357
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	94
Total Luminaire Watts	25
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.22
Spacing Criterion (90-270)	1.22
Spacing Criterion (Diagonal)	0.94
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.37 ft (Diameter)
Luminous Width (90-270)	0.37 ft (Diameter)
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	7147	7147	7147
55	2203	2203	2203
65	272	272	272
75	0	0	0
85	0	0	0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 6CR-TL-P28-8TW-XXX-POE-OW-WH-XX_4000K.IES

CANDELA TABULATION

	<u>0</u>
0	2022.840
5	2083.190
10	2145.775
15	2190.478
20	2287.709
25	2493.346
30	1953.549
35	343.100
40	89.407
45	49.174
50	25.705
55	12.294
60	5.588
65	1.118
70	1.118
75	0.000
80	0.000
85	0.000
90	0.000

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 6CR-TL-P28-8TW-XXX-POE-OW-WH-XX_4000K.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	826.66	N.A.	35.10
0-30	1890.86	N.A.	80.20
0-40	2301.22	N.A.	97.60
0-60	2354.41	N.A.	99.90
0-80	2356.89	N.A.	100.00
0-90	2356.89	N.A.	100.00
10-90	2156.52	N.A.	91.50
20-40	1474.56	N.A.	62.60
20-50	1515.35	N.A.	64.30
40-70	55.38	N.A.	2.30
60-80	2.49	N.A.	0.10
70-80	0.29	N.A.	0.00
80-90	0.00	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	2356.89	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	200.37
10-20	626.29
20-30	1064.2
30-40	410.36
40-50	40.79
50-60	12.40
60-70	2.20
70-80	0.29
80-90	0.00
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 6CR-TL-P28-8TW-XXX-POE-OW-WH-XX_4000K.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	102	101	100	98	98	97	96	94
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	86	83	82
4	98	91	85	81	96	90	85	81	87	83	80	85	82	79	84	81	78	77
5	93	85	79	75	92	84	79	75	82	78	74	81	77	74	79	76	73	72
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59
9	76	67	61	57	75	66	61	57	66	60	57	65	60	57	64	60	57	55
10	73	63	58	54	72	63	57	54	62	57	54	61	57	53	61	56	53	52

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 6CR-TL-P28-8TW-XXX-POE-OW-WH-XX_4000K.IES

UGR TABLE - CORRECTED

Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size UGR Viewed Crosswise

X=2H	Y=2H	3.0	3.0	3.0	3.0	3.0	UGR Viewed Endwise				
	3H	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
	4H	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
	6H	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
	8H	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
	12H	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0


4H	2H	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
	3H	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
	4H	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
	6H	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
	8H	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
	12H	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0

8H	4H	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
	6H	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
	8H	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
	12H	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0

12H	4H	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
	6H	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
	8H	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0

Maximum UGR = 3.0

POLAR GRAPH

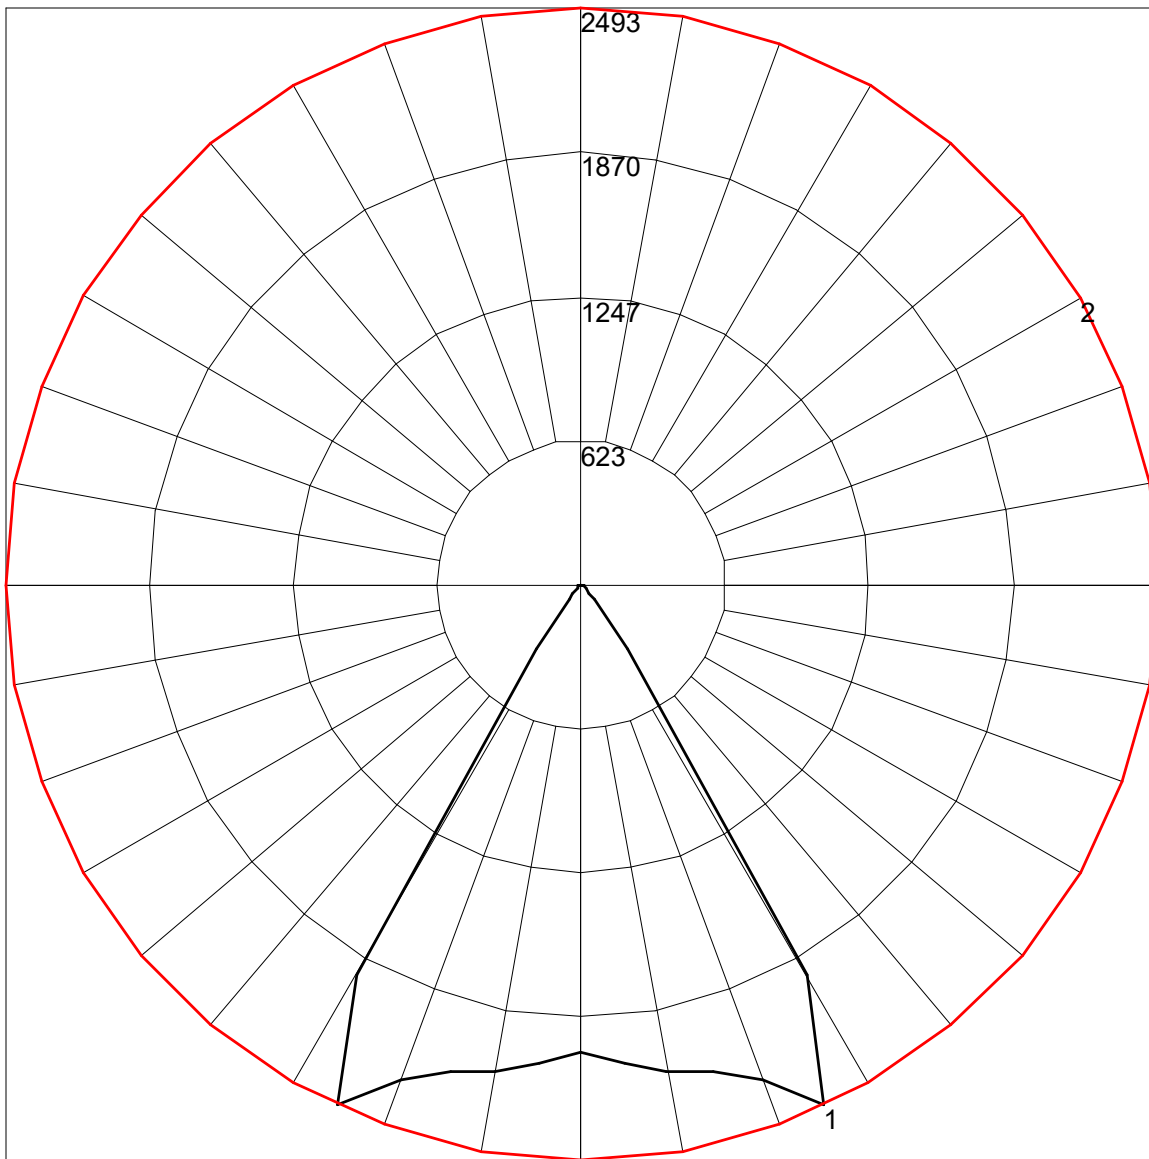

Maximum Candela = 2493.346 Located At Horizontal Angle = 0, Vertical Angle = 25
1 - Vertical Plane Through Horizontal Angles (90 - 270)
2 - Horizontal Cone Through Vertical Angle (25) (Through Max. Cd.)