

Environmental Product Declaration

1/2 in. (12.7 mm) Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels

Plaster City, CA, Shoals, IN



USG Sheetrock® Brand Lay-In and Clean Room Gypsum Ceiling Panels

- USG Clean Room™ panels have a vinyl-laminated face with sealed back and edges for use in cleanroom environments up to Class 100/ISO 5.
- Washable and scrubbable finish—impact and scratch resistant.
- USDA Certified Biobased Product
- Panels meet USDA/FSIS requirements for food processing areas.
- ClimaPlus™ 30 year limited system warranty against visible sag.



TRACI V2.1 ENVIRONMENTAL IMPACTS (CRADLE-TO-GRAVE)

Functional Unit – 1,000 sf (92.9 m²)

Global Warming Potential (kg CO ₂ eq.)	3.61E+02
Ozone Depletion Potential (kg CFC-11 eq.)	4.88E-09
Acidification Potential (kg SO ₂ eq.)	5.44E-01
Eutrophication Potential (kg N eq.)	6.12E-02
Photochemical Ozone Creation Potential (kg O ₃ eq.)	1.07E+01
Abiotic Resource Depletion Potential Fossil Fuels (MJ, LHV)	7.85E+02

For over a century, sustainable practices have naturally been an inherent part of our business at USG and CGC. Today, they help shape the innovative products that become the homes where we live, the buildings where we work and the arenas where we play. From the product formulations we choose, to the processes we employ, USG and CGC are committed to designing, manufacturing, and distributing products that minimize overall environmental impacts and contribute toward a healthier living space. We believe that transparency of product information is essential for our stakeholders and Environmental Product Declarations (EPDs) are the next step toward an even more transparent USG and CGC. For additional information, visit usg.com, cgcinc.com and usg.ecomedes.com.



ASTM INTERNATIONAL
WWW.ASTM.ORG
COPYRIGHT ©2014

Environmental Product Declaration

1/2 in. (12.7 mm) Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels

Plaster City, CA, Shoals, IN



This declaration is an Environmental Product Declaration (EPD) in accordance with ISO 14025 and ISO 21930; 2017. EPDs rely on Life Cycle Assessment (LCA) to provide information on a number of environmental impacts of products over their life cycle. Exclusions: EPDs do not indicate that any environmental or social performance benchmarks are met, and there may be impacts that they do not encompass. LCAs do not typically address the site-specific environmental impacts of raw material extraction, nor are they meant to assess human health toxicity. EPDs can complement but cannot replace tools and certifications that are designed to address these impacts and/or set performance thresholds – e.g. Type 1 certifications, health assessments and declarations, environmental impact assessments, etc. Accuracy of Results: EPDs regularly rely on estimations of impacts, and the level of accuracy in estimation of effect differs for any particular product line and reported impact. Comparability: EPDs are not comparative assertions and are either not comparable or have limited comparability when they cover different life cycle stages, are based on different product category rules or are missing relevant environmental impacts. EPDs from different programs may not be comparable.

DECLARATION NUMBER	EPD 533	
PROGRAM OPERATOR	ASTM International – 100 Barr Harbor Drive, West Conshohocken, PA USA www.astm.org	
EPD Type	Type III Declaration per ISO 14025:2006	
DECLARATION HOLDER	USG Corporation - 550 W. Adams St., Chicago, IL USA	
DECLARED PRODUCT	Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels	
REFERENCE PCR	NSF, Product Category Rules for Gypsum Panel Products, v1.1, April 2020	
DATE OF ISSUE	8/10/23	
PERIOD OF VALIDITY	5 Years	
CONTENTS OF THE DECLARATION	This EPD is complete and contains the following: • Product System Documentation • Life Cycle Calculation Rules • Life Cycle Assessment Results • Further Information • References	
This declaration was independently verified in accordance with ISO 14025 and ISO 21930:2017 ☐ INTERNAL ☒ EXTERNAL		Tim Brooke, ASTM International
This life cycle assessment was independently verified in accordance with ISO 14044 and the reference PCR by:		Thomas P. Gloria, Industrial Ecology Consultants



ASTM INTERNATIONAL
WWW.ASTM.ORG
COPYRIGHT ©2014

Environmental Product Declaration

1/2 in. (12.7 mm) Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels

Plaster City, CA, Shoals, IN



1. Product System Documentation

1.1 Product Description and Product Identification

1/2 in. (12.7 mm) Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels have a vinyl-laminated face with sealed back and edges for use in cleanroom environments up to Class 100/ISO 5. They are washable and scrubbable finish—impact and scratch resistant and USDA Certified Biobased Product. These panels meet USDA/FSIS requirements for food processing areas and offer the ClimaPlus™ 30 year limited system warranty against visible sag.

1.2 Designated Application

- Kitchens and food preparation areas
- Restrooms and utility areas
- Locker rooms
- Parking garages
- Exterior protected soffits

1.3 Product Technical Data

Table 1: Summary of the technical data

Technical Data	ASTM Test Method	Requirement	Acceptance Criteria
Safety Data Sheet – Yes/No		Yes	Available at usg.com and cgcinc.com
Noncombustibility	E136	Noncombustible	Meets
Surface-burning characteristics			
Flame spread	E84	Flame spread not greater than 25 ¹ and	15
Smoke developed	E84	smoke developed not greater than 450	5
Class A	E84		Meets
Core hardness			
Field	C473 (B)	Not less than 11 lbf (49 N) ¹	Meets
End	C473 (B)	Not less than 11 lbf (49 N) ¹	Meets
Edge	C473 (B)	Not less than 11 lbf (49 N) ¹	Meets
Flexural strength			
Parallel	C473 (B)	Not less than 36 lbf (160 N) ¹	Meets
Perpendicular	C473 (B)	Not less than 107 lbf (476 N) ¹	Meets
Humidified deflection	C473	Not greater than 5/16" (8 mm) ¹	Meets
Nail pull resistance	C473 (B)	Not less than 77 lbf (343 N) ¹	Meets

1. Per ASTM C1396 for 1/2 in. (12.7 mm) gypsum wallboard.



ASTM INTERNATIONAL
WWW.ASTM.ORG
COPYRIGHT ©2014

Environmental Product Declaration

1/2 in. (12.7 mm) Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels

Plaster City, CA, Shoals, IN



1.4 Placing on the Market/Application Rules

Standard rules for installing gypsum board are presented in the *USG Gypsum Construction Handbook* available online at usg.com and cgcinc.com.

1.5 Product Composition

Table 2: Product specifications and formula

Product Specifications	Measurement	Value
	Thickness	1/2 in. (12.7 mm)
	Lengths	2 ft. (610 mm)
	Width	2 ft. and 4 ft. (610 and 1219 mm)
	Weight (nominal)	2.0 lb./sq. ft. (9.8 kg/sq. m.)
	Edges	Square Edge

Product Formulation	Additive	Percentage)
	Gypsum	90%
	Paper	5%
	Additives	4%
	Vinyl	1%

1.6 Product Manufacture

The manufacture of gypsum board starts with the combining of the dry ingredients in a screw conveyor, feeding of this dry ingredient mixture into a pin mixer where these dry ingredients are mixed with water and wet additives. The resulting slurry is fed between two sheets of paper; facing paper (Manila) on the bottom and backing paper (Newsline) on the top. The wet gypsum board is allowed to hydrate after which the hard board is cut and transferred into a kiln for evaporation of excess water. After removal of the evaporative water, the board is cut to its final size, vinyl is laminated to the face and an optional coating is applied and the resulting product is packaged.

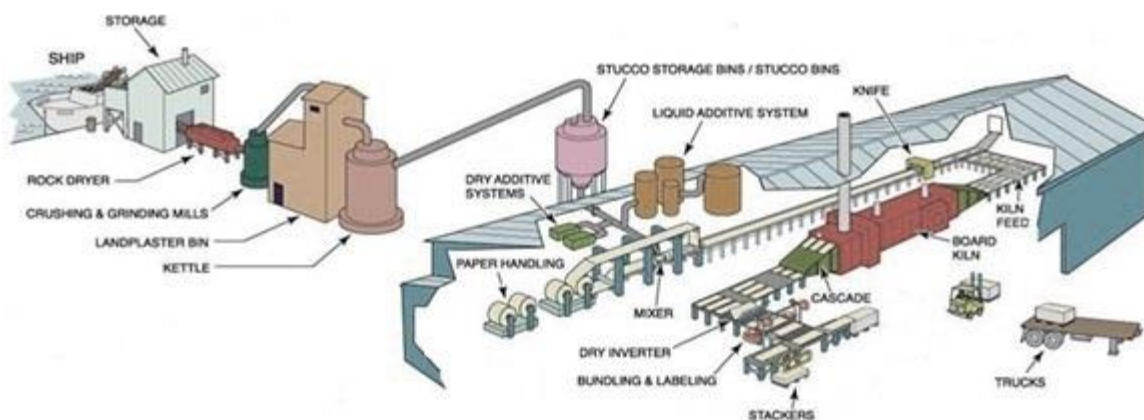


Figure 1: Process diagram for the production of gypsum board



ASTM INTERNATIONAL
WWW.ASTM.ORG
COPYRIGHT ©2014

Environmental Product Declaration

1/2 in. (12.7 mm) Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels

Plaster City, CA, Shoals, IN



1.7 Environment and Health During Manufacturing

USG and CGC have led the building sector's effort in developing and supplying sustainable construction materials. Today, sustainability is integrated into the design and manufacture of every wall, ceiling, and flooring product. As both a producer and a buyer of raw materials, we have a responsibility to extensively review and select each material we use. Each decision we make is based on careful consideration of environmental and safety effects over time. Raw materials used in our products are carefully selected and go through a screening procedure. Incoming raw materials are tested for contaminants by an internal lab and third-party labs for consideration of use and worker, environmental, and end-user exposure. This due diligence helps to ensure our products are safe to handle in our manufacturing plants and on job sites while having minimal impact on occupant health and indoor and outdoor environments.

1.8 Packaging

A quantity of 4 pieces is collected, packaged and then palletized for shipment.

1.9 Distribution

The default distances from the PCR for both 280 miles (451 km) and rail 130 miles (209 km) transport were used in this analysis. Final transportation from the distribution gate to the construction site was defaulted to 25 miles (40 km) by a single unit truck with an empty backhaul.

1.10 Product Installation

The Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels must be installed in accordance with all applicable USG Interiors installation guidelines. Approved installation procedures are provided in the Ceiling Systems Handbook published by the Ceiling and Interior Systems Construction Association and must be followed. Installation of USG's ceiling and grid products is accomplished by manual labor using mostly hand tools. No material or energy inputs are required on the jobsite.

As dictated by the PCR, "the default on-site installation waste" scenario for gypsum boards was 10% on a surface area basis of gypsum board product. A 10% installation waste factor was adhered to in this LCA analysis.

1.10 Environment and Health During Use Stage

Under normal conditions of intended use, this material does not pose a risk to the environment or occupant health.

1.11 Reference Service Life

A default RSL of 75 years shall be assumed for the product. An assumed Estimated Service Life (ESL) of 75 years shall be used for building life.



ASTM INTERNATIONAL
WWW.ASTM.ORG
COPYRIGHT ©2014

Environmental Product Declaration

1/2 in. (12.7 mm) Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels

Plaster City, CA, Shoals, IN



1.12 End-of-Life

Currently, Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels are typically disposed of in a building and construction landfill. In certain areas, USG has agreements with third-party gypsum waste recyclers who collect gypsum construction waste at jobsites for recycling and then transport this post-consumer gypsum raw material to specific USG manufacturing plants for use in the manufacturing of new wallboard. There are several alternative options to landfilling such as the use of reground gypsum wallboard for soil amendment applications. Contact your local EPA for reuses rules and regulations.

1.13 Documentation on Additional Environmental Information

Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels have achieved GREENGUARD Gold Certification and qualifies as a “Low Emitting” material per California Department of Public Health CDPH/EHLB/Standard Method (CA Section 01350) for school classroom, and private office modeling scenarios, and meets USGBC’s LEED® v4 emission requirements.

2. LCA Calculation Rules

2.1 Functional Unit

The functional unit for this LCA study is 1,000 sf (92.9 m²) of product. This functional unit is consistent with the PCR.

Table 1: Functional unit

Gypsum Board	Value and Units
Functional Unit	1,000 sf (92.9 m ²)
Declared Density	2000 lbs./MSF
Declared Density	9.8 kg/m ²

2.2 System Boundary

This cradle-to-grave (A1-C4) LCA study covers all the production steps from raw materials extracted from the earth (the cradle) to pallets of finished products in cartons ready to be shipped from the plant as well as distribution, installation, use and end of life stages (the grave).



ASTM INTERNATIONAL
WWW.ASTM.ORG
COPYRIGHT ©2014

Environmental Product Declaration

1/2 in. (12.7 mm) Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels

Plaster City, CA, Shoals, IN

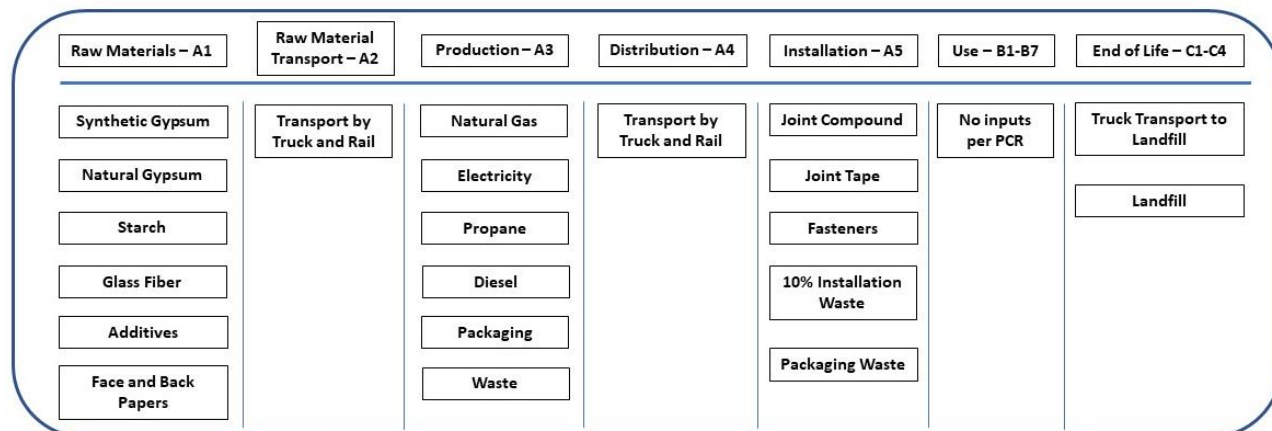


Figure 2: Specific processes covered by this EPD by life cycle stage

2.3 Estimates and Assumptions

All paper raw material and energy data is specific to the manufacture of USG Manila and Newsline papers at the specific USG paper mill. 1/2 in. (12.7 mm) Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels raw material and energy inputs are specific to the specific products produced at the gypsum board plant.

2.4 Cut-off Criteria

The cut-off criteria for input flows to be considered within each system boundary were as follows:

Mass – if a flow is less than 1% of the cumulative mass of the model flows it may be excluded, providing its environmental relevance is minor.

Energy – if a flow is less than 1% of the cumulative energy of the system model it may be excluded, providing its environmental relevance is minor.

The sum of the excluded material flows must not exceed 5% of mass, energy, or environmental relevance.

2.5 Background Data

All background was sourced from critically reviewed Sphera LCA for Experts databases.

2.6 Data Requirements and Data Sources

Manufacturer specific data was obtained from each gypsum board manufacturing plant. The LCA model was created using the Sphera LCA for Experts software. Specific comments related to data quality requirements cited in ISO 14025 Section 4.2.3.6.2 include the following.

Temporal: In the case of 1/2 in. (12.7 mm) Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels, the LCI data was collected from each gypsum board plant for the 2019 calendar year.



ASTM INTERNATIONAL
WWW.ASTM.ORG
COPYRIGHT ©2014

Environmental Product Declaration

1/2 in. (12.7 mm) Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels

Plaster City, CA, Shoals, IN



Geographical: Where possible, all processes were chosen as being representative of U.S. manufacturing processes.

Technical: The data selected for this study is specific to the technology used in the preparation of the raw materials.

Precision: The raw material usage amounts were derived from plant quality data on finished products and product formulas.

Completeness: Virtually all the significant raw material flows (> 99%) used for panel production has been modeled. The exception consists of transportation of the coating raw materials; the effect of which was determined to be less than 1% of the total.

Representative: Where possible all the data sets were selected to be representative of U.S.-based production, are less than 10 years in age and are representative of the technology being employed.

Consistency: All the manufacturing processes were modeled in a consistent manner throughout this study in accordance with the goal and scope definitions.

Reproducibility: The information contained in this study, including raw material, energy and transportation distance inputs, have been fully documented in the LCA report.

Sources of Data: The sources for the processes used in this study have been fully provided in the LCA report and are representative of the material and energy sources used in actual production.

Uncertainty: The relative uncertainty associated with this study has been minimized. No significant assumptions have been made.

2.7 Period Under Review

All raw material and energy inputs are for the 2019 calendar year.

2.8 Allocation

The LCI data was collected for the gypsum board plant for the 2019 production year. Raw material and energy inputs were allocated to Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels based on the mass of those panels.

2.9 Comparability

Any comparison of EPDs shall be subject to the requirements of ISO 14025:2006 section 6.7.2, ISO 21930:2017 section 5.5, and NSF Part B PCR for Gypsum Panel Products, section 5.5.



ASTM INTERNATIONAL
WWW.ASTM.ORG
COPYRIGHT ©2014

Environmental Product Declaration

1/2 in. (12.7 mm) Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels

Plaster City, CA, Shoals, IN



3. Life Cycle Assessment Results

PRODUCTION STAGE			CONSTRUCTION STAGE		USE STAGE							END OF LIFE STAGE			
Raw material supply	Transport	manufacturing	Transport from gate to site	Assembly/Install	Use Stage	maintenance	Repair	Replacement	Refurbishment	Operational Energy Use	Operational Water Use	Deconstruction	Transport	Waste Processing	Disposal
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

Figure 3: System Boundary

3.1 Life Cycle Impact Assessment Results

Table 4: LCA Results using Traci 2.1 Impacts

Mass-Weighted Average of Environmental LCA Results for 1,000 SF of 1/2 in. (12.7 mm) Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels										
Impact Assessment Method: TRACI 2.1		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Environmental Impact Category	Units	Impact	Impact	Impact	Impact	Impact	Impact	Impact	Impact	Impact
Global warming	kg CO2 eq.	2.80E+02	4.37E+01	3.74E+01	0.00E+00	0.00E+00	2.40E+01	0.00E+00	3.79E+02	3.61E+02
Ozone Depletion Potential (ODP)	kg CFC 11-eq.	4.39E-09	1.14E-13	4.88E-10	0.00E+00	0.00E+00	7.49E-11	0.00E+00	4.81E-09	4.88E-09
Acidification Potential	kg SO2 eq.	4.08E-01	7.23E-02	6.31E-02	0.00E+00	0.00E+00	1.11E-01	0.00E+00	6.51E-01	5.44E-01
Eutrophication Potential (EP)	kg N eq.	4.51E-02	9.60E-03	6.49E-03	0.00E+00	0.00E+00	5.34E-03	0.00E+00	6.60E-02	6.12E-02
Photochemical Ozone Creation Potential (POCP)	kg O3-Equiv.	7.73E+00	1.76E+00	1.24E+00	0.00E+00	0.00E+00	2.05E+00	0.00E+00	1.29E+01	1.07E+01
Abiotic Depletion Potential (ADP) - fossil fuels	MJ surplus energy	6.22E+02	8.19E+01	8.08E+01	0.00E+00	0.00E+00	4.92E+01	0.00E+00	8.19E+02	7.85E+02



ASTM INTERNATIONAL
WWW.ASTM.ORG
COPYRIGHT ©2014

Environmental Product Declaration

1/2 in. (12.7 mm) Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels

Plaster City, CA, Shoals, IN



Table #5: LCA Results for Resources Usages

Mass-Weighted Average of Resource and Waste Flows for 1,000 SF of 1/2 in. (12.7 mm) Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels (A1-C4)										
Use of Primary Resources		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Renewable primary resources used as an energy carrier (RPRE)	MJ, NCV	2.38E+02	2.47E+01	3.19E+01	0.00E+00	0.00E+00	1.59E+00	0.00E+00	4.20E+01	3.38E+02
Renewable primary resources with energy content used as material (RPRM)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable primary resources used as an energy carrier (NRPRE)	MJ, NCV	4.80E+03	6.19E+02	6.23E+02	0.00E+00	0.00E+00	3.98E+01	0.00E+00	3.87E+02	6.47E+03
Non-renewable primary resources with energy content used as material (NRPRM)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Secondary material, secondary fuel and recovered energy		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Secondary Material (SM)	kg	3.92E+01	0.00E+00	4.36E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.76E-01	4.41E+01
Renewable Secondary Fuel (RSF)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable Secondary Fuel (NRSF)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renewable Energy (RE)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Consumption of Fresh Water	m3	1.58E+00	8.45E-02	1.90E-01	0.00E+00	0.00E+00	5.44E-03	0.00E+00	6.28E-02	1.92E+00
Additional inventory parameters for transparency		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Removals and emissions associated with biogenic carbon content of the bio-based product	kg CO2-eq.	-1.31E+01	0.00E+00	1.31E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.18E+01	0.00E+00
Emission from calcination and uptake from carbonation	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Removals and emissions associated with biogenic carbon content of the bio-based packaging	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emissions from land use change	kg CO2-eq.	4.76E-02	5.00E-02	1.54E-02	0.00E+00	0.00E+00	3.22E-03	0.00E+00	8.76E-03	1.25E-01
Emissions from combustion of waste from renewable sources used in production processes	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emissions from combustion of waste from non-renewable sources used in production processes	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Indicators describing waste		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Hazardous waste disposed	kg	2.31E-05	1.78E-09	2.89E-06	0.00E+00	0.00E+00	1.15E-10	0.00E+00	3.55E-07	2.64E-05
Non-hazardous waste disposed	kg	3.79E+01	5.39E-02	1.08E+02	0.00E+00	0.00E+00	3.47E-03	0.00E+00	9.37E+02	1.08E+03
High-level radioactive waste	kg	9.34E-02	1.77E-03	1.08E-02	0.00E+00	0.00E+00	1.14E-04	0.00E+00	4.43E-03	1.11E-01
Intermediate and low-level waste	kg	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Assignments of output flows at the end-of-life		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Components for re-use (CRU)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling (MR)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for energy recovery (MER)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Recovered energy exported (EE)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00



ASTM INTERNATIONAL
WWW.ASTM.ORG
COPYRIGHT ©2014

Environmental Product Declaration

1/2 in. (12.7 mm) Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels


Plaster City, CA, Shoals, IN



4. LCA Interpretation

The figure below graphically depicts the relative contributions for the cradle-to-grave production of 1,000 sf of 1/2 in. (12.7 mm) Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels. The dominant source of greenhouse gases are generated during the board drying process. This analysis is typical for all gypsum plants covered in this study. Future reductions in Global Warming Potential should be directed at reducing the amount of water entering the dryer.

Figure 4: Process Dominance Analysis for the Production of 1 MSF of 1/2 in. (12.7 mm) Sheetrock® Brand Lay-In Ceiling Panels

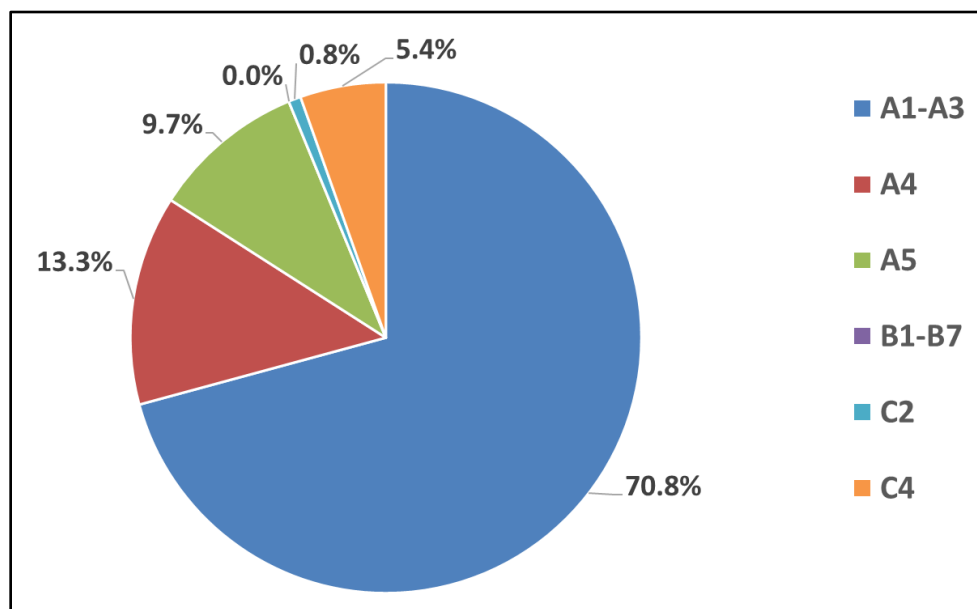

Environmental Product Declaration

1/2 in. (12.7 mm) Sheetrock® Brand Lay-In and Clean Room Lay-In Gypsum Ceiling Panels

Plaster City, CA, Shoals, IN



5. References

LCA Report

A Cradle-to-Gate (A1-A3) and Cradle-to-Grave (A1-C4) Life Cycle Assessment of Selected Sheetrock® Brand Paper-Faced Gypsum Board Products, 8/4/23. USG (Confidential)

Product PCR

UL Environment - Product Category Rule (PCR) Guidance for Building-Related Products and Services Part B: Joint Compound EPD Requirements, ULE 10010-30, v.1, August 3, 2016.

Sustainability Reporting Standards

EN 15804:2012-04 - Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction product

ISO 14025:2006 - Environmental labels and declarations — Type III environmental declarations — Principles and procedures

ISO 14040:2006/Amended 1:2020 - Environmental management – Life cycle assessment – Principles and framework

ISO 14044:2006/Amended 2:2020 - Environmental management – Life cycle assessment – Requirements and guidelines

ISO 14046:2013 - Environmental management- Water footprint- Principles, requirements and guidelines

ISO 15392:2008 - Sustainability in building construction- General principles

ISO 15686-1:2011 - Buildings and constructed assets- Service life planning- Part 1: General principles

ISO 15686-2:2008 - Buildings and constructed assets- Service life planning Part 2: Service life prediction procedures

ISO 15686-7:2008 - Buildings and constructed assets- Service life planning Part 7: Performance evaluation for feedback of service life data from practice

ISO 15686-8:2008 - Buildings and constructed assets- Service life planning Part 8: Reference service life and service life estimation

ISO 21930:2017 - Sustainability in buildings and civil engineering works — Core rules for environmental product declarations of construction products and services



ASTM INTERNATIONAL
WWW.ASTM.ORG
COPYRIGHT ©2014