

CYO eSET Touchfree Basin mixer without pop-up waste without temperature setting - Chrome

CYO

ST 010 205 7811



- 190 mm projection
 - fixed spout
 - rectangular, air-enriched flow
 - hole diameter 35 mm
 - 1/2" connection
 - max. flow 4.5 l/min
 - lead-free
 - automatic hygiene flush
 - suitable for thermal disinfection
 - adjustable follow-up time
 - high-frequency sensors with self-calibration
 - magnetic valve
 - 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set
 - This product can help a building to meet requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- Cannot be combined with basins in conducting materials (e.g. steel, river stone).**
Cannot be combined with basins that have a closing drain.
ATTENTION: Separate terms and conditions for electronic articles are applicable.

Individual components of this set

You need the following components for this set

	1x	42 766 970 90		1x	13 805 811-00
---	----	---------------	---	----	---------------



CYO eSET Touchfree Basin mixer without pop-up waste without temperature setting - Chrome

CYO

ST 010 205 7811

CYO eSET Touchfree Basin mixer without pop-up waste without temperature setting - Chrome

CYO

ST 010 205 7811

Fits: IMO, LULU, MADISON, MEM, TARA,
CL.1, LISSÉ, VAIA, META, CYO

- automatic hygiene flush
 - suitable for thermal disinfection
 - adjustable follow-up time
 - high-frequency sensors with self-calibration
 - magnetic valve
 - 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set
- Cannot be combined with basins in conducting materials (e.g. steel, river stone).**
Cannot be combined with basins that have a closing drain.
ATTENTION: Separate terms and conditions for electronic articles are applicable.

Cannot be combined with basins in conducting materials (e.g. steel, river stone).

Cannot be combined with basins that have a closing drain.

ATTENTION: Separate terms and conditions for electronic articles are applicable.

Required miscellaneous



eSET Touchfree Basin mixer without temperature setting for combining with free-standing fittings -

35 742 970 90

Required miscellaneous



eSET Touchfree Basin mixer without temperature setting for combining with wall-mounted fittings -
• max. recess depth 125 mm
• min. recess depth 90 mm

35 743 970 90

Recommended miscellaneous


Extension for Touchfree 500 mm - 12 765 970 90



CYO eSET Touchfree Basin mixer without pop-up waste without temperature setting - Chrome

CYO


ST 010 205 7811
mm [inches]

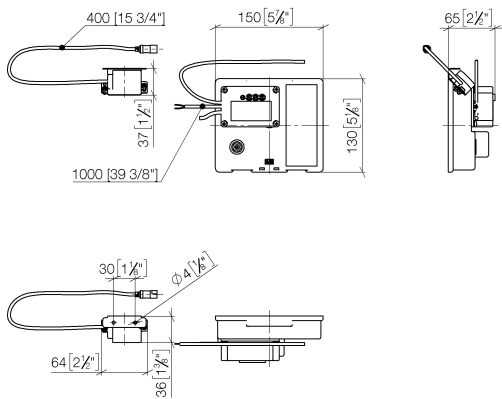

Certificates

LGA_29120.	WRAS_1906116.	IAPMO_EGS.	CE000001_eSet_Touchfree_20171206_DE_signed.	CE000002_eSet_Touchfree_20171206_EN_signed.
LGA_29119.				

ST 010 205 7811

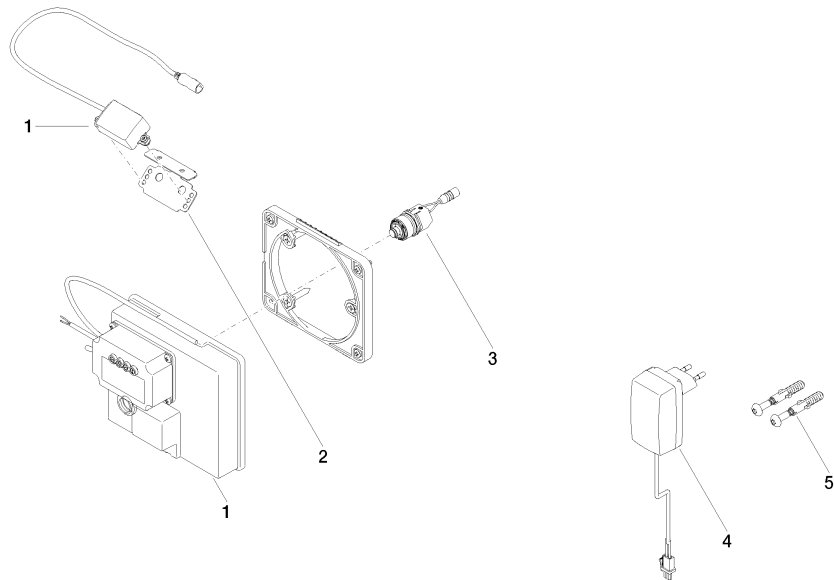

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 10 01 177 00 90	electronic accessories	1	2
2	90 17 20 199 00 90	holder	1	2
3	04 30 50 079 00 90	valve	1	2
4	04 10 01 050 00 90	power supply	1	60
5	04 30 31 024 01 90	fixing set	1	2

CYO eSET Touchfree Basin mixer without pop-up waste without temperature setting - Chrome

CYO

ST 010 205 7811



- 190 mm projection
- fixed spout
- rectangular, air-enriched flow
- hole diameter 37 mm
- 1/2" connection
- max. flow 4.5 l/min
- lead-free
- This product can help a building to meet requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

	Chrome	13 805 811-00
	Brushed Platinum	13 805 811-06
	Dark Chrome	13 805 811-19
	Brushed Durabrand (23kt Gold)	13 805 811-28
	Platinum / Brushed Platinum	13 805 811-36
	Durabrand / Brushed Durabrand (23kt Gold)	13 805 811-38
	Brushed Dark Platinum	13 805 811-99

Recommended miscellaneous



Concealed wall elbow -

35 085 970 90

- max. recess depth 163 mm
- min. recess depth 90 mm



CYO eSET Touchfree Basin mixer without pop-up waste without temperature setting - Chrome


CYO

ST 010 205 7811


CYO eSET Touchfree Basin mixer without pop-up waste without temperature
setting - Chrome

CYO

ST 010 205 7R11
mm [inches]

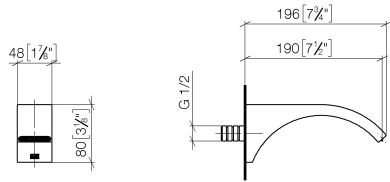


Flow rate chart

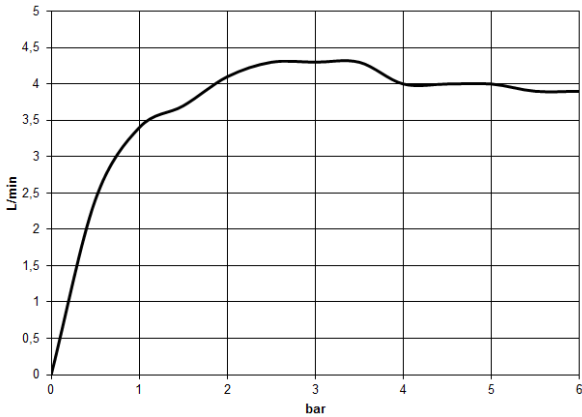

Certificates

LGA_38116. IAPMO_8834 (2). IAPMO_N-4976. IAPMO_4976 (6). IAPMO_6397.

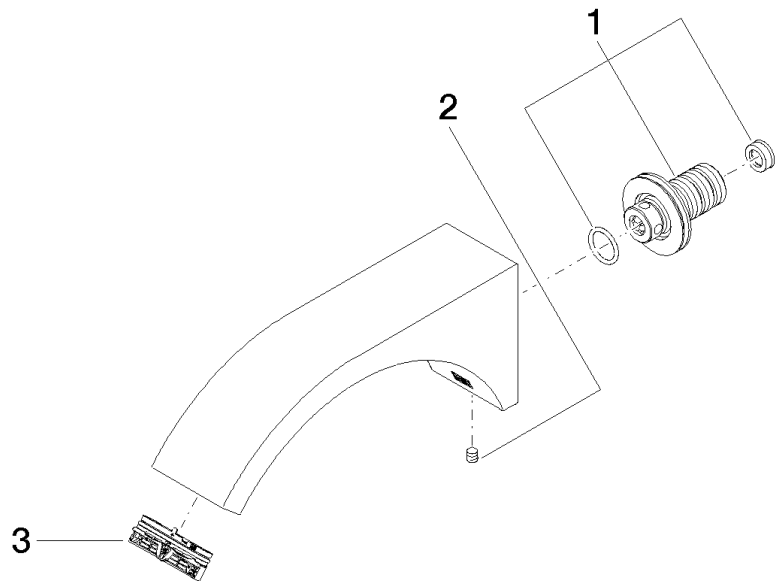

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 24 03 108 01 90	nipple set	1	2
2	90 31 11 004 00 90	pin	1	2
3	90 29 03 121 00 90	aerator	1	2