

## **CODE NUMBER**

12001015

#### **DESCRIPTION**

SU-1209 Urinal and ROYAL 186 SFSM Flushometer.

## **COMPONENTS**

Flushometer: Code 3912748Urinal: Code 1101209

## **DETAILS**

• Flush Volume: 0.125 gpf (0.5 Lpf)

Nominal Dimensions: 14 ½" × 20 ¾" × 25 ¼" (368 × 527 × 641mm)

## **FLUSHOMETER FEATURES**

- True Mechanical Override Flush Button
- Four (4) size C batteries included
- "Low Battery" Flashing LED
- "User in View" Flashing LED
- 72-Hour Sentinel Flush
- 3/4" I.P.S. screwdriver Bak-Chek® angle stop with free spinning, vandal resistant stop cap
- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange with Set Screw
- No External Volume Adjustment to Ensure Water Conservation
- Handle Packing, Main Seat, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine resistance
- Infrared Sensor with Multiple-focused, Lobular Sensing Fields for high and low target detection

# **FIXTURE FEATURES**

- White Vitreous China
- Large footprint to cover old caulk lines
- · Washdown flushing action
- Integral flushing rim
- ¾" I.P.S. top spud inlet
- 2" NPT outlet flange
- Vandal resistant strainer assembly included
- All mounting hardware included
- 100% factory flush tested



## **COMPLIANCES & CERTIFICATIONS**





















(ADA Compliant, BAA Compliant, BREEAM Water Credit, CalGreen Compliant, CEC Compliant, cUPC Green Certified, Green Globes Water Credit, HPD, LEED V4 Water Efficiency Credit, Satisfies LEED Credits, WELL Building Standard)

## **DOWNLOADS**

- Retrofit Urinal Installation Instructions
- Royal Exposed Installation Instructions
- EBV-500/550-A Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- EBV500/EBV550 Repair and Maintenance Guide
- Royal Manual Diaphragm Flushometer Repair and Maintenance Guide
- Additional Downloads

## **NOTES**


All information contained within this document subject to change without notice.


## WARRANTY

View Warranty Information



# **ROUGH-IN**



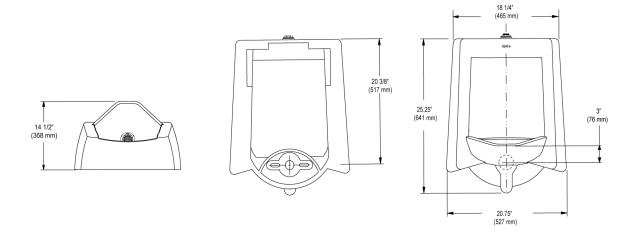

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com