

METALWORKS™ Blades – Classics

Linear Panels with Acoustical Options
smooth texture




FAST134
Select Items Ship Fast
armstrongceilings.com/fast134



MetalWorks Blades – Classics 2" x 6" panels in Effects Cherry

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

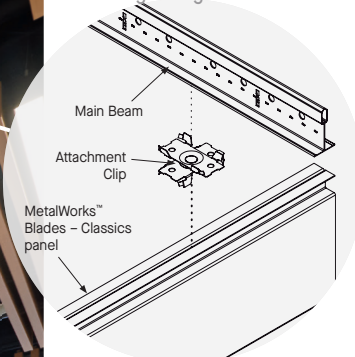

plus capabilities
to do more




armstrongceilings.com/capabilities
See more photos at:
armstrongceilings.com/photogallery

Durable metal vertical panels in multiple sizes with swivel attachment clips that allow for design flexibility.

KEY SELECTION ATTRIBUTES

- Four new Sequels™ pre-coat, wood-look finishes** are part of the FAST134 program
- MetalWorks™ FASTPeel™ panels** feature an easier-to-remove protective film
- Now available in 17 Effects™ wood-look finishes
- Standard blade sizes in multiple lengths with either:
 - 4" depth and 1" width
 - 6" depth with 1" or 2" widths
- Premium blade sizes available:
 - Lengths up to 120"
 - Depths up to 10"
 - Widths 1" or 2"
- Available in 22-1/2", 46-1/2", 94-1/2", and 96" lengths for creative design layouts
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Select products included in the FAST134 program – ready to ship in 4 weeks or less
- Blade panels available with either two factory-installed end caps, one end cap, or no end caps
- MetalWorks™ Blades – Classics panels are part of the Sustain™ portfolio (unperforated panels only)
- Create acoustical or non-acoustical upscale linear designs
- Fast, easy installation with standard Prelude® XL® 15/16" or 360° painted suspension systems
- Select finishes now standard with easier-to-remove FASTPeel™ protective film

END CAP DETAILS in Sequels Cape May Cherry



1. Factory-applied End Cap
2. Field-cut End Cap

METALWORKS™ Blades – Classics

Linear Panels with Acoustical Options
smooth texture




LEED® WELL LBC		15% RECYCLED CONTENT													
energy management	✓	construction waste mgmt	✓	regional materials	✓	design for flexibility	✓	EPD	✓	recyclable/producer resp.	✓	biobased materials	✓	recycled content	✓
												sourcing of raw materials	✓	material ingredient reporting	✓
												low emitting materials	✓	lighting quality	✓
												acoustics	✓		

LOCATION DEPENDENT



MetalWorks™ Blades - Classics in Sequels Cape May Cherry

STANDARD COLORS & FINISHES Due to printing limitations, shade may vary from actual product.

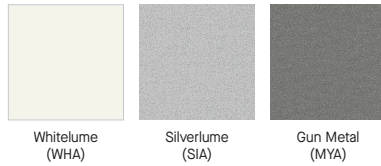


Effects™ Classic Dye-Sublimation



Effects™ Bold Dye-Sublimation




Effects™ Subtle Dye-Sublimation

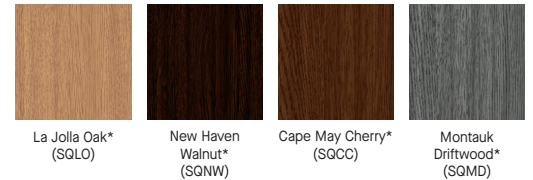


*Not part of the Sustain™ portfolio

CUSTOM COLORS & FINISHES



* Colors that are pre-qualified to meet Sustain portfolio requirements are available upon request. Other made-to-order colors must be evaluated if sustainability criteria is required. Lead time will increase. For more information, visit our website at armstrongceilings.com/metalworks or contact Architectural Specialties TechLine at 1 877 276-7876 for custom panel lengths. For premium requests contact ASQuote, ASQuote@armstrongceilings.com

PERFORATION OPTIONS (1:2 scale shown)



METALWORKS™ Blades – Classics

Linear Panels with Acoustical Options
smooth texture



LEED® WELL™ LBC

15%

RECYCLED CONTENT



LOCATION DEPENDENT

VISUAL SELECTION

PERFORMANCE Dots represent high level of performance.

Item No. ◆	Description/ Dimensions D x W x L (Inches) Custom Sizes Available	
8157D41_	Vertical panel with caps on both ends	
8157D61_	4 x 1 x 94-1/2"	
8157D62_	6 x 1 x 94-1/2"	
8156D41_	Vertical panel with caps on both ends	
8156D61_	4 x 1 x 46-1/2"	
8156D62_	6 x 1 x 46-1/2"	
8155D41_	Vertical panel with caps on both ends	
8155D61_	4 x 1 x 22-1/2"	
8155D62_	6 x 1 x 22-1/2"	
7202D41_	Vertical panel with cap on one end	
7202D61_	4 x 1 x 96"	
7202D62_	6 x 1 x 96"	
7203D41_	Vertical panel with no end caps	
7203D61_	4 x 1 x 96"	
7203D62_	6 x 1 x 96"	

Fire Rating	CleanAssure™ Disinfectable Panels						DURABILITY	
	Fog	Spray	Wipe	Wash	Scrub	Soil		
Class A	•	•	•	•	•	•		
Class A	•	•	•	•	•	•		
Class A	•	•	•	•	•	•		
Class A	•	•	•	•	•	•		
Class A	•	•	•	•	•	•		

FAST
4 WEEKS
or Less

FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134


◆ When specifying or ordering, include the appropriate perforation and color suffix with the item number (e.g., 8157D41 M 1 5 E X C H).

ACOUSTIC INFORMATION Dots represent high level of performance.

Blade	4" O.C.	6" O.C.	12" O.C.	16" O.C.	20" O.C.	24" O.C.
4" x 1"	0.55	0.45	0.25	0.20	0.20	0.15
6" x 1"	0.85	0.65	0.45	0.35	0.30	0.25
6" x 2"	1.05	0.80	0.50	0.40	0.35	0.30


DESIGN EXAMPLES Multiple lengths and swivel attachment clip allow for design freedom. Below are some design layout examples from our MetalWorks Blades design guide.

1' x 4' Grid Layouts

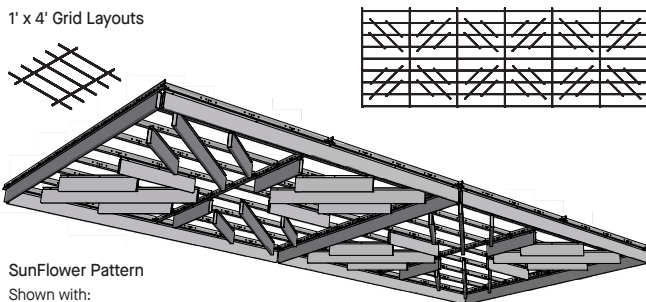

SunFlower Pattern
Shown with:
4 x 1 x 22-1/2" panels
4 x 1 x 46-1/2" panels

4' x 4' Grid Layouts

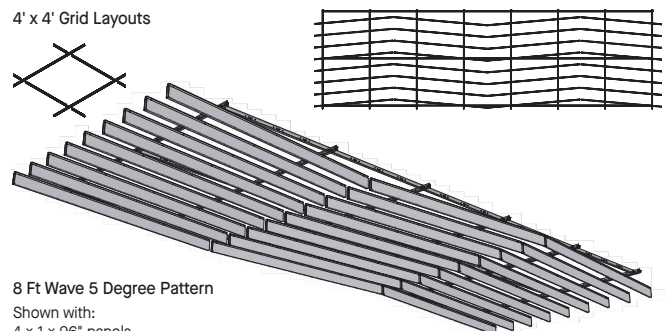

8 Ft Wave 5 Degree Pattern
Shown with:
4 x 1 x 96" panels

METALWORKS™ Blades – Classics

Linear Panels with Acoustical Options
smooth texture



LEED® WELL® LBC

15% RECYCLED CONTENT




LOCATION DEPENDENT

SUSPENSION SYSTEM & ACCESSORIES

	Item No. ♦	Description	Dimensions (Inches) Nominal L x W x H	Color	PCS/CTN
Suspension Systems	7301_ _	Prelude® XL® 12" HD Main Beam	144 x 15/16 x 1-11/16"	White, Silver Grey, Gun Metal Grey*	20
	XL7341	Prelude XL 4" Cross Tee	48 x 15/16 x 1-11/16"	White, Black*	60
	XL8320	Prelude XL 2" Cross Tee	24 x 15/16 x 1-11/16"	White, Black*	60
	730136BL	Black 360 Prelude XL 12" HD Main Beam	144 x 15/16 x 1-11/16"	Black	20
	XL734036BL	Black 360 Prelude XL 4" Cross Tee	48 x 15/16 x 1-11/16"	Black	60
	XL732036BL	Black 360 Prelude XL 2" Cross Tee	24 x 15/16 x 1-11/16"	Black	60
Wall-to-Wall Installations	780036	12" Angle Molding	144 x 7/8 x 7/8"	White, Black*	30
	HD7801_ _	10" Angle Molding	120 x 7/8 x 7/8"	Silver Grey, Gun Metal Grey*	30
	BERC2	Beam End Retaining Clip	N/A	N/A	200
Floating Cloud Installation	AX6STR_ _ _ ♦	Axiom® Classic 6" Straight Trim	120 x 3/4 x 5-13/16"	White, Black, Silver Grey, Gun Metal Grey* Black is recommended for Sequels panel finishes	N/A
	7239	Adjustable Trim Clip (ATC)	N/A	N/A	50
	5344_ _ _ _	4" Effects Wood Looks Trim	Nominal 120" Length	Effects Finishes	6
	5346_ _ _ _	6" Effects Wood Looks Trim	Nominal 120" Length	Effects Finishes	6

- ♦ Add the 2-digit color suffix to the item number when specifying or ordering (e.g. AX6STR S G), add an extra digit "3" before the color suffix if paint is required inside and outside of trim (e.g. AX6STR 3 S G).
* Items with the same finish name will coordinate but may not be an exact color match.


ACCESSORIES

	Item No. ♦♦	Description	Color	Pcs/Ctn
	7204_ _	MetalWorks™ Blades – Classics Attachment Clip	Stainless Steel, Black Oxide	100
	7205D41 7205D61 7205D62	MetalWorks Blades – Classics 4" x 1" Alignment Device 6" x 1" Alignment Device 6" x 2" Alignment Device	N/A	24
	8158D41_ _ _ _ 8158D61_ _ _ _ 8158D62_ _ _ _	MetalWorks Blades – Classics 4" x 1" Field-Cut End Cap 6" x 1" Field-Cut End Cap 6" x 2" Field-Cut End Cap	Whitelume, Silverlume, Gun Metal, Sequels Finishes, Effects Finishes	10

- ♦♦ When specifying or ordering, include the color suffix with the item number (e.g., 8158D41 E X C H).

SUSPENSION SYSTEMS

15/16"



PHYSICAL DATA

Material
Aluminum – thickness 0.032"

Surface Finish
Painted: Factory-applied polyester paint
Sequels™: Pre-coated coil
Effects™: Powder-coated, dye-sublimation, post-production finish

Custom colors and finishes also available. Contact TechLine for custom color matching requests at 1 877 276-7876.

Fire Performance
Class A: Tested per ASTM E84. Flame Spread Index 25 or less. Smoke Developed Index 50 or less.
CAN/ULC S102 surface burning characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

Acoustical Options
Perforated panels are supplied with a black fiberglass fleece acoustic infill bag to absorb sound (varies by Blades panel length).

Design Considerations
When installed, panels hang either 4-7/8" or 6-7/8" below the face of the grid, depending on the depth of Blade. Panels can be supported by intermediate duty main beams or cross tees, with 2 attachment clips per panel. See MetalWorks Blades – Classics design guide online for additional design layouts.

MetalWorks Blades – Classics can be cut in the field only when using the Field-Cut End Cap. See installation instructions for details.

Installation Considerations
Panels with certain product finishes, e.g., Effects™ and Natural Reflections, are not MetalWorks™ FASTPeel™ panels and will be protected by other means for packaging and handling purposes.

Design Support
For custom design assistance contact ProjectWorks® Design Services or visit armstrongceilings.com/projectworks

Seismic Restraint
MetalWorks Blades – Classics are approved for application in all seismic areas when installed per the seismic guidelines in the Armstrong Ceilings installation instructions.

FAST134 Program Considerations
Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.
Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.
Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.
Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

Cleaning and Disinfecting
Cleaning and CDC-approved disinfecting options available on armstrongceilings.com/cleaning

Warranty
Details at armstrongceilings.com/warranty

Weight
D41 panels: 0.50 LBS/LF
D61 panels: 0.61 LBS/LF
D62 panels: 0.68 LBS/LF

