

TUMBLLED

Stone is unique among surface materials in that decades of use do not destroy it - instead, they refine it, allowing a more subtle aesthetic to evolve. Tumbling speeds this process, intentionally softening the edges and surface of the stone. The result is an inviting, matte look with luxurious textures and reduced variation in color. Stocked in a variety of our most popular marbles and limestones, in 4" x 12", 12" x 24", and Chevron 24 5/16" x 213/16" tile.



TUMBLLED 4" X 12"



Thassos A2 Select



Arabescato



Bianco Carrara



Calacatta Rosa




Rosa Portogallo



Balkan Beige



Smoke

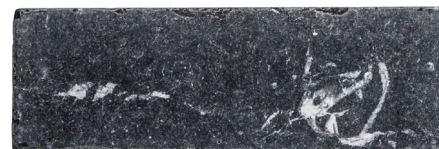

Nero Marquina

*Tumbled
4" x 12" x 3/8"
Stone Field Tile*

APPLICATIONS									VARIATION ²	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4	
Commercial Light/Medium	All	Yes, including steam ¹	See Notes ¹	No	Yes, non-freeze thaw ¹	No	Yes	Yes	V1 V2 V3 V4	

INSTALLATION/MAINTENANCE											FIELD TILE
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	QR CODE	
Ardex X4 White Tile & Stone Mortar ³	See Notes ⁴	1/8" minimum	Mapei Mapelastick AquaDefense	Mapei Keracaulk Unsanded	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	No	Recommended		FIELD TILE 4" x 12" x 3/8"

NOTES										
¹ Showers: Product MUST be installed in accordance with current TCNA Handbook Stone Methods. Shower floor: Smoke - No Balkan Beige- Yes, conventional only ² Nero Marquina, Smoke, Balkan Beige, Arabescato - V3; Thassos - V1 ³ Alternate mortar - Mapei Kerabond w/Keralastic Additive or Mapei Granirapid 2-Part System Smoke only - Ardex N23 White Microtec Rapid Set or Mapei Granirapid White 2-part System ⁴ Calacatta Rosa, Rosa Portogallo - Ardex FG-C Microtec Unsanded, Mapei Ultracolor Plus FA or Mapei Keracolor Sanded Thassos, Bianco Carrara, Arabescato, Balkan Beige, Smoke, Nero Marquina - Ardex FL Rapid Set Sanded, Mapei Ultracolor Plus FA or Mapei Keraclor Sanded Tech Notes: If job requires mud work, White Portland cement must be used. Inherent voids may be present in the stone that will not be filled during production. This is intended to be part of the natural aesthetic of this product. Shade variation of white and inclusions are to be expected as well as unfilled voids within the stone, piece to piece, and in individual pieces.										

TUMBLLED CHEVRON



Nero Marquina



Smoke Limestone



Bianco Carrara



Calacatta Rosa



Rosa Portogallo



Brunetta




Sabbia

Limestone Tumbled
24 5/16" x 2 13/16" x 3/8"
Stone Chevron Field Tile

APPLICATIONS									VARIATION ²	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4	
Commercial Light/Medium	All	Yes, including steam ¹	See Notes ¹	No	No	No	Yes	Yes		
INSTALLATION/MAINTENANCE										
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	QR CODE
Ardex X4 White Tile & Stone Mortar ³	Ardex FL Rapid Set Sanded ⁴	1/16" minimum	Mapei Mapelastick AquaDefense	Mapei Keracaulk Unsanded	AquaMix Sealers Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	No	Recommended	
NOTES										
¹Showers: Product MUST be installed in accordance with current TCNA Handbook Stone Methods Shower floor: Sabbia, Smoke - No Rosa Portogallo, Nero Marquina, Calacatta Rosa, Brunetta, Bianco Carrara - Yes, including steam, linear drain ²Variation: Rosa Portogallo, Calacatta Rosa and Bianco Carrara - V2 ³Alternate mortar: Ardex X77 White Microtec Fiber Reinforced Mortar or Mapei Kerabond White w/Keralastic Additive Sabbia and Smoke only - Ardex N23 White Microtec Rapid Set Alternate Motor: Ardex N23 White Microtec Rapid Set or Mapei Granirapid 2-Part System ⁴Alternate grout: Mapei Ultracolor Plus FA or Ardex FG-C Microtec Unsanded Tech Notes: White Mortar is recommended for natural stone. If job requires mud work, White Portland Cement must be used. Inherent voids may be present in the stone that will not be filled during production. This is intended to be part of the natural aesthetic of this product. Seal and utilize a grout release prior to grouting.										
FIELD TILE										
LIMESTONE TUMBLED CHEVRON 24 5/16" x 2 13/16" x 3/8"										

TUMBLLED 12" X 24"

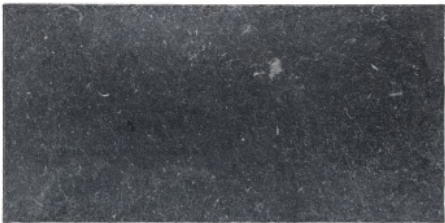

Nero Marquina



Bianco Carrara



Brunetta

Tumbled
12" x 24" x 3/8"
Stone Field Tile



Calacatta Rosa



Rosa Portogallo



Sabbia



Smoke

APPLICATIONS								
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND
Commercial Light/Medium	All	Yes, including steam ¹	Yes, including steam, linear drain ²	No	Yes, non-freeze thaw ³	No	Yes	Yes

VARIATION ⁴			
V1	V2	V3	V4

INSTALLATION/MAINTENANCE										
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	QR CODE
Ardex X4 White Tile & Stone Mortar ⁵	Ardex FL Rapid Set Sanded ⁶	1/16" minimum	Ardex B + 9	Ardex SX Silicone Sealant	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	No	Recommended	

NOTES
¹Showers: Product MUST be installed in accordance with current TCNA Handbook Stone Methods ²No shower floor: Smoke and Sabbia ³No exterior wall: Smoke and Sabbia ⁴Variations: Calacatta Rosa, Rosa Portogallo and Bianco Carrara - V2 ⁵Setting material: Smoke and Sabbia - Ardex N23 White Microtec Rapid Set ⁶Alternate setting material - Ardex X77 White Microtec Fiber Reinforced Mortar or Mapei Kerabond White w/Keralastic Additive Smoke only - Mapei Granirapid White 2-part System ⁶ Alternate grout: Mapei Ultracolor Plus FA or Ardex FG-C Microtec Unsanded Tech note: White Mortar is recommended for natural stone. If job requires mud work, White Portland cement must be used. Inherent voids may be present in the stone that will not be filled during production. This is intended to be part of the natural aesthetic of this product. The 12" x 24" tumbled will modulate with the 4" x 12" tumbled. Seal and utilize a grout release prior to grouting.

FIELD TILE
STONE FIELD TILE 12" X 24" x 3/8"

TUMBLLED 8X8"



Smoke



Sunrise Cream



Sunrise Pink



Birch White

Tumbled
Stone Field Tile



Mountain Mist Grey



Sunrise Red




Sunrise Gold

APPLICATIONS									VARIATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4	
Commercial Light/Medium	All	Conventional Only ¹	Conventional Only ¹	No	Yes, non-freeze thaw ¹	No	Yes	Yes		


INSTALLATION/MAINTENANCE											AVAILABLE SIZE
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	QR CODE	STONE FIELD TILE Tumbled 0.444 SF/PC
Ardex X77 White Microtec Fiber Reinforced Mortar ⁵	Ardex FL Rapid Set Sanded ⁶	1/16" minimum	Ardex B + 9	Ardex SX Silicone Sealant	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	No	Recommended		

NOTES
¹Showers: Product MUST be installed in accordance with current TCNA Handbook Stone Methods ²No exterior wall: Mountain Mist and Sunrise Pink ³Alternate setting material -Mapei Kerabond White w/Keralastic Additive or Ardex 100% Solids Epoxy Adhesive White ⁴Alternate grout: Ardex DG 1 – One Component Grout or Ardex FG-C Microtec Unsanded Tech note: Minor vein washout is possible in wet installations. White mortar is recommended for natural stone. Seal and utilize a grout release prior to grouting.


TUMBLLED

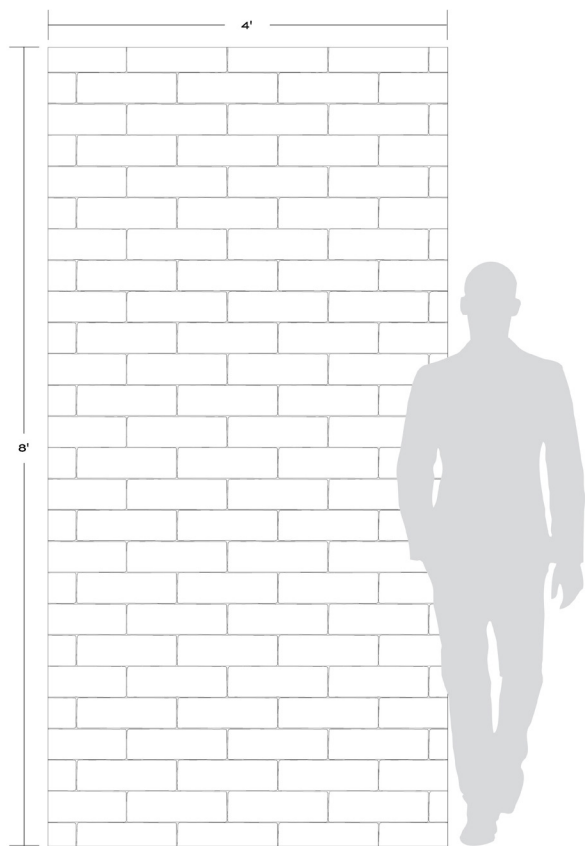

Tumbled 4" x 12" Field Tile

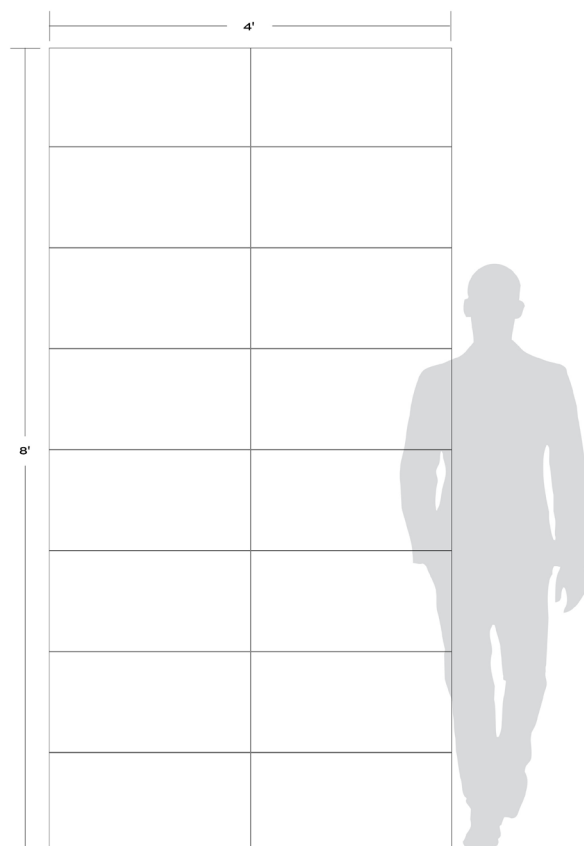

Tumbled 12" x 24" Field Tile

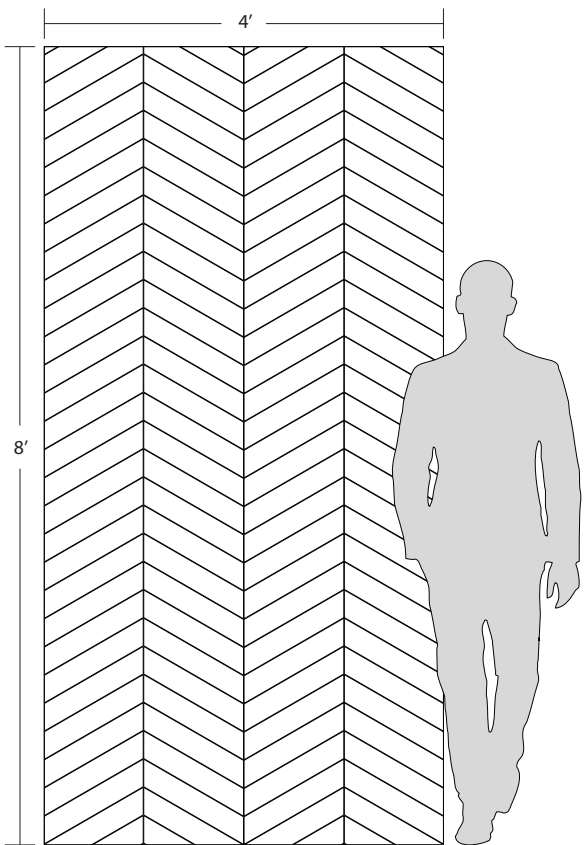

Tumbled Chevron 24 5/16" x 2 13/16" x 3/8"