


THASSOS

Since antiquity, Thassos has set the bar for white marble. Hailing from the Greek isle of the same name, Thassos is renowned for its quality, its exceptional hardness and its consistency. Sought after and quarried for millennia, it is undeniably a true classic, with applications that span the spectrum. Artistic Tile carries Thassos in many formats and makes extensive use of this beautiful stone in our Tailored To customization program. If white marble is what you're after, Thassos should be at the top of your list.

PICTURED: THASSOS & NERO MARQUINA

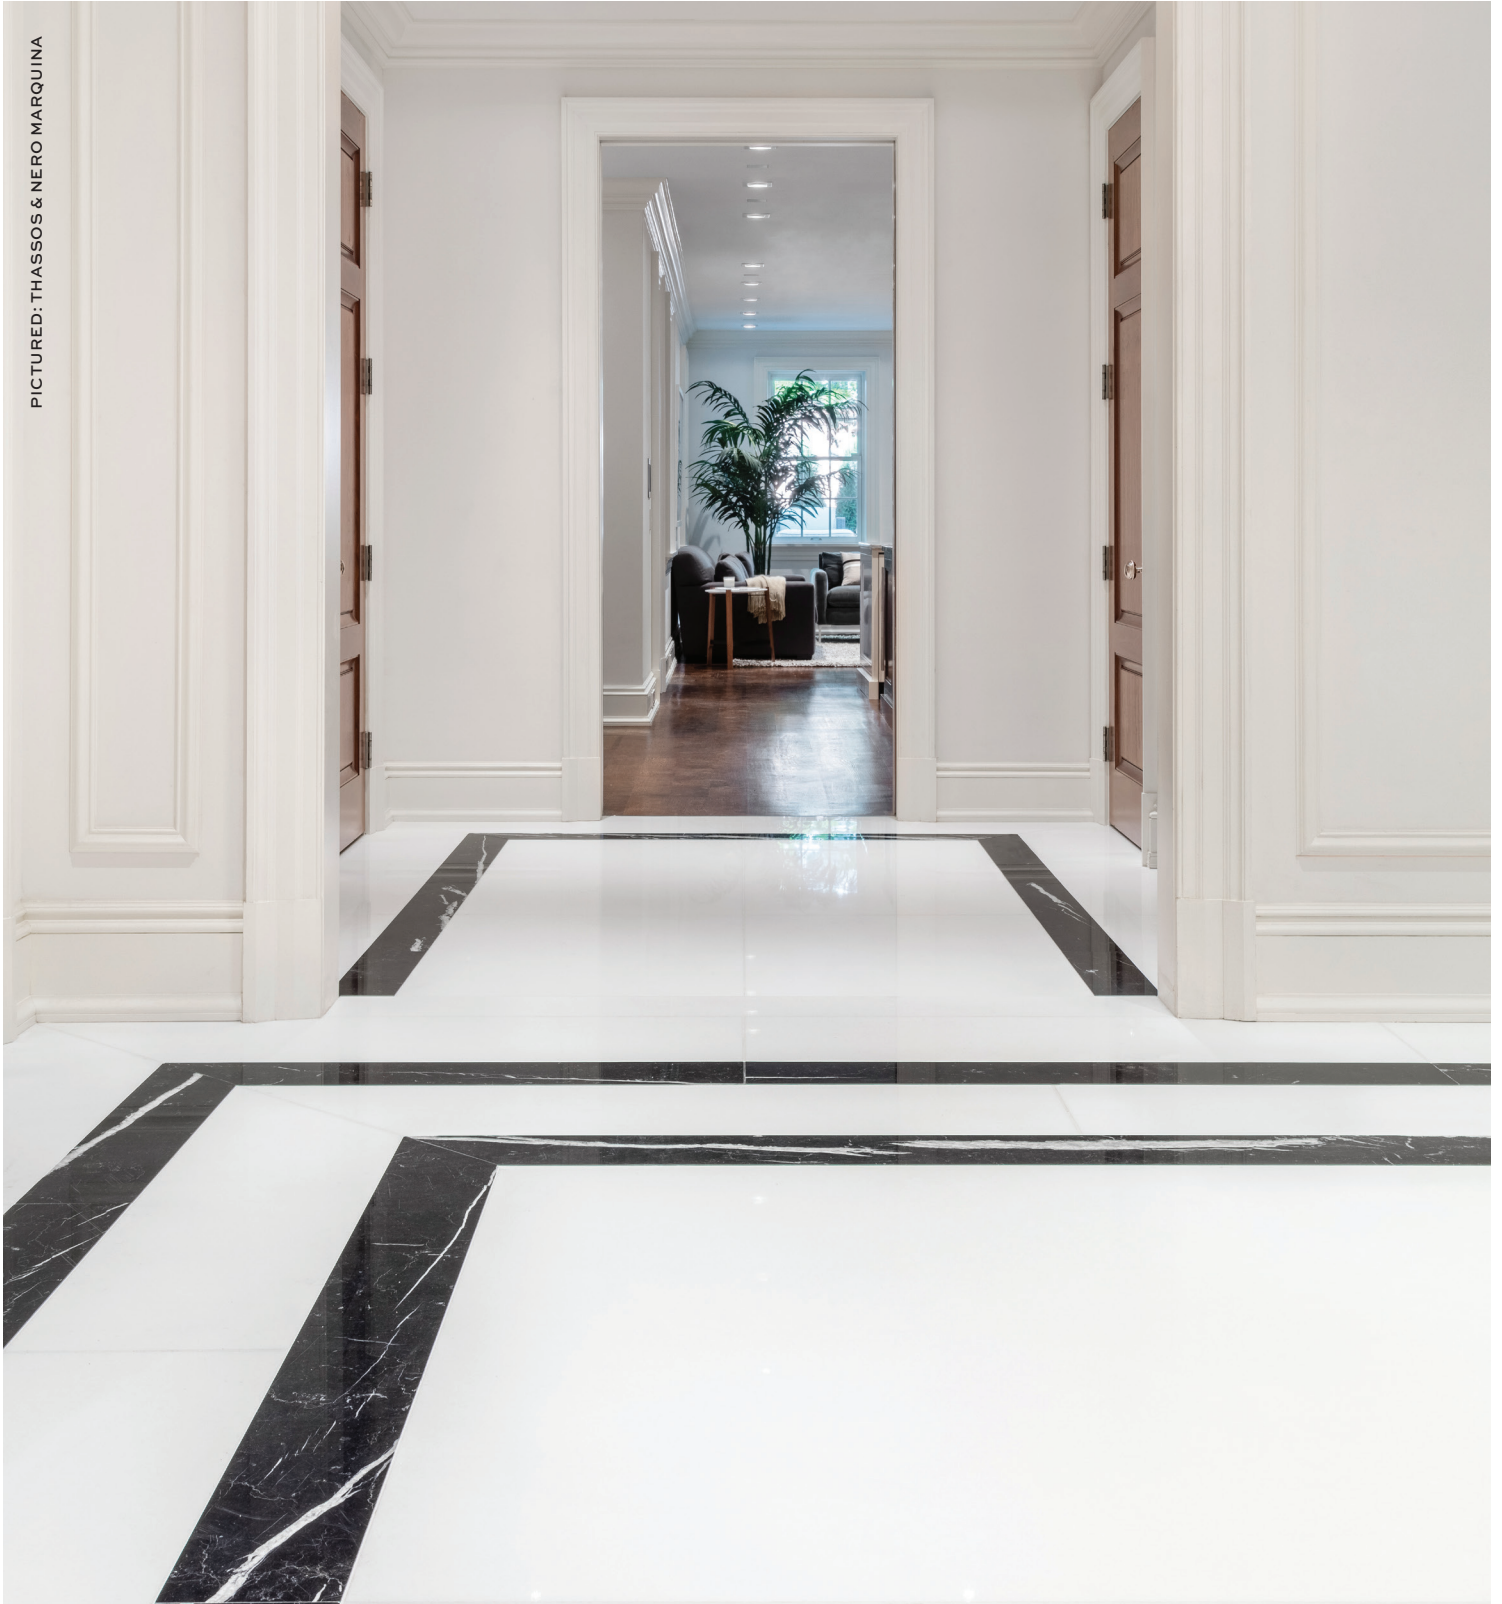

THASSOS

MOSAIC PATTERNS



3cm Straight Joint



1cm Straight Joint




3cm Hexagon



3cm Broken Joint



1 x 3 Chevron

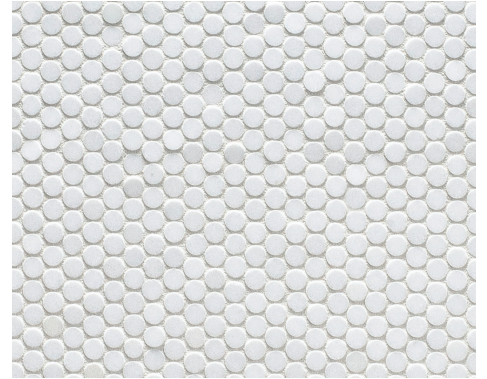

Studs

APPLICATIONS									VARIATION ²		TAILORED TO CUSTOMIZATION ³	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1 V2 V3 V4		CARPET CUTTING	
Medium Traffic Commercial	All	Yes, including steam	Yes	No	Yes, non-freeze thaw	No	Yes	Yes ¹			FIELD	
											FINISH	
											MOSAIC	
											SADDLE	
											VANITY TOP	
											WATERJET	
INSTALLATION/MAINTENANCE										AVAILABLE SLAB SIZES		
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT			
Mapei Kerabond/ Keralastic White ⁴	Mapei Keracolor Unsanded ⁵	See Notes Below ⁶	Mapei Mapelastick AquaDefense	Mapei Keracaulk Unsanded ⁷	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	See Notes Below ⁸	As established on sheets	Recommended			
NOTES										SLAB 3/4" (2 cm) & 1 1/4" (3cm) Polished A1 & A2 Select		
¹ Discoloration may occur. ² Variation: A1 Select - V1, A2 Standard & A3 Commercial - V2 ³ Saddle & Vanity Top - Slab ⁴ Alternate mortar - Mapei Granirapid White ⁵ Alternate grout - Mapei Ultracolor Plus Sanded ⁶ Field - 1/16". Mosaics & waterjet - As established on sheets. Slab - 1/8" minimum. ⁷ Alternate caulk - Mapei Keracaulk Sanded ⁸ For field tile and mosaics use TCNA Handbook, for slab use MIA DSDM.												

SETTING NATURAL STONE MOSAICS ON A SHOWER FLOOR WITH ARDEX 100% SOLIDS EPOXY ADHESIVE WHITE

ARDEX 100% Solids Epoxy Adhesive White is suitable for each of the following installation methods shown in the Shower Receptors section in the most current edition of TCNA Handbook for Ceramic, Glass, and Stone Tile Installation.

B414-24 Stone, B441-24 Stone, B415-24 Stone, B420-24 Stone,
B426-24 Stone, B431-24 Stone, B421-24 Stone, B422-24 Stone.

IMPORTANT NEXT STEPS:	IMPORTANT WATER CLEANUP STEPS
• Pour Part A (Resin) into Part B (Hardener) bucket and hand mix to achieve color blend. • Mix using a power mixer (approx. 650 RPM) for approx. 2 minutes. • Pour the entire mixture out of the bucket onto the floor or onto a scrape piece of tile. It is very important to get the entire mixture out of the bucket immediately. • Spread a thin layer of epoxy mortar with a flat trowel over a predetermined area of the shower floor. • Using a square notch trowel or a V-notch trowel, spread the epoxy mortar over the same predetermined shower floor area. • Next flatten out all trowel ridges with flat side of trowel striving to achieve 100% coverage over the predetermined shower floor area. • Place the interlocking mosaic sheets into mortar bed over the predetermined shower floor area for 100% coverage. • Tap down and level the mosaic sheets with a grout float over the predetermined area. • Allow mortar to set, harden, and cure.	• Wipe up any epoxy residue with sponges and clean water. • Note: No soap and no chemicals are needed. Just clean water. • Rinse sponges and change the water often. • Finally wipe with cool, clean water & clean sponges. • Use clean microfiber cloths for final wipe down.

Artistic Tile recommends sealing all natural stones before grouting.