


MAX FINE PORCELAIN

Capture the look of natural stone in an ultra-thin, durable porcelain. Max Fine ¼ - inch thick porcelain slabs and tiles are lightweight, easy to handle and a great option for wall and floor installations. Max Fine uses modern technology to combine beauty and practicality like never before.



MAX FINE PORCELAIN



*Thassos
Polished*

Special Order Only



*Calacatta Gold
Polished & Matte*

Matte - Special Order Only



*Statuary
Polished & Matte*



*Bianco Lasa
Polished*

Slab - Special Order Only



*Blue De Savoie
Polished*

Slab - Special Order Only




*Onyx Pearl
Polished*



*Eramosa
Polished*

Slab - Special Order Only

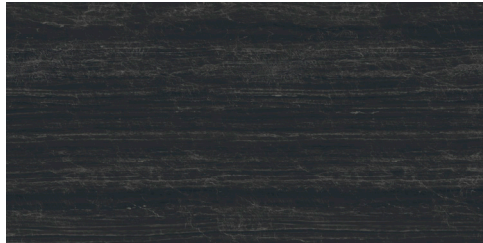

*Black Venato
Polished*

APPLICATIONS								ATTRIBUTES	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	DCOF ⁵ (Matte)	
Medium Traffic Commercial ¹	All ²	Yes, including steam	No	No	Yes, including freeze thaw ³	No	Yes ⁴	0.60 0.61 0.61	

VARIATION				
V1	V2	V3	V4	

INSTALLATION/MAINTENANCE									
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
See Notes Below ⁶	Mapei Ultracolor Plus Sanded ⁷	1/16" minimum	Mapei Mapelastix AquaDefense	Mapei Keracaulk Sanded	Not Required	AquaMix Concentrated Stone & Tile Cleaner	See Notes Below ⁸	No	Required

AVAILABLE SIZES	
FIELD TILE 29 1/2" x 29 1/2" x 1/4" Polished: Calacatta Gold, Statuary & Thassos - Special Order Only Matte: Calacatta Gold - Special Order Only	
SLAB 59" x 118 1/4" x 1/4" Polished: Bookmatch A & B - Calacatta Gold & Statuary Random - Calacatta Gold, Statuary, Onyx Pearl & Black Venato Thassos, Eramosa, Blue De Savoie & Bianco Lasa - Special Order Only Matte: Random - Calacatta Gold & Statuary	

NOTES
¹ Floor application - concrete slab substrate only, level to within 1/8" in 10 ft. ² Wall application - over 20 ft. in height requires the use of clips. Contact Artistic Tile for details. ³ Direct bond or ventilated facade. Wall application - over 20 ft. in height requires the use of clips. ⁴ Yes, mounted on Schluter Kerdi board or similar. ⁵ Matte finish only. The standard requires a minimum wet DCOF Acutest value greater than 0.42 for ceramic tiles (inclusive of porcelain) for level interior spaces expected to be walked upon when wet. ⁶ Floor applications - Mapei Ultraflex LFT, Wall applications - Mapei Granirapid System Alternate mortar - Ardex X77 ⁷ Alternate grout - Ardex FL Rapid Set Sanded ⁸ Mapei Thin Body Porcelain Tile Reference Guide & Manufacturer's Installation Guidelines. Artistic Tile recommends the use of factory trained installers. Design Note: Calacatta & Statuary slabs are offered in both book match and random. Book match sold as A & B. The random selection does not guarantee a particular face. 40% Recycled Content

MAX FINE PORCELAIN

CALACATTA GOLD



Random

Random

Random

Random



Book Match A

Book Match B

Book Match A

Book Match B

STATUARY



Random

Random

Random


Random

Book Match A

Book Match B

Book Match A

Book Match B

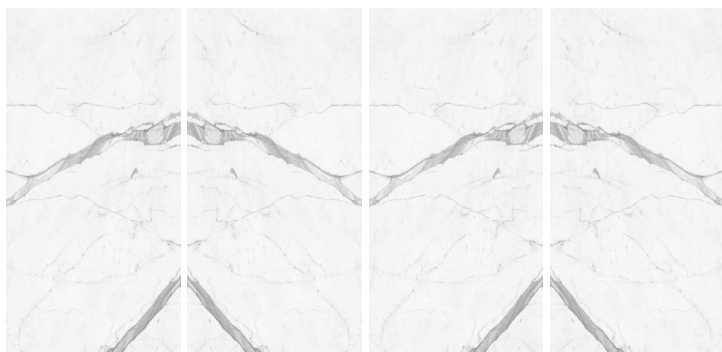


Book Match B



Book Match A

Book Match B

Book Match A

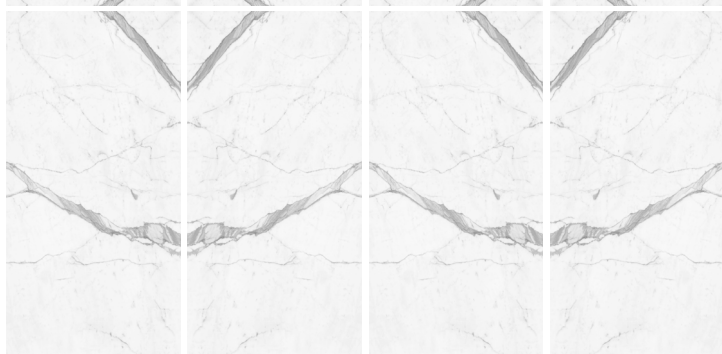

MAX FINE PORCELAIN

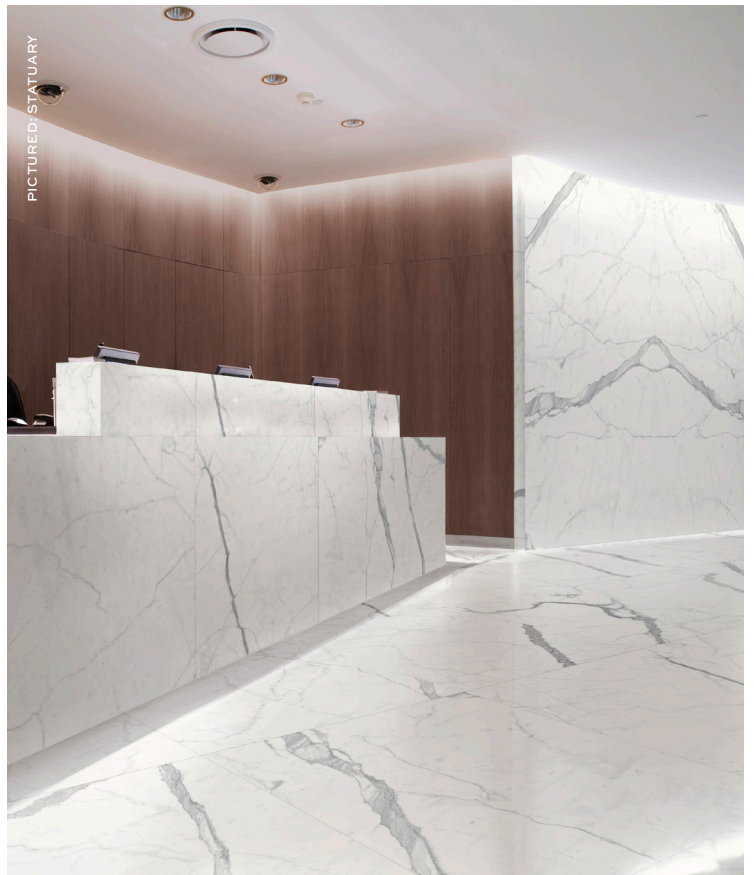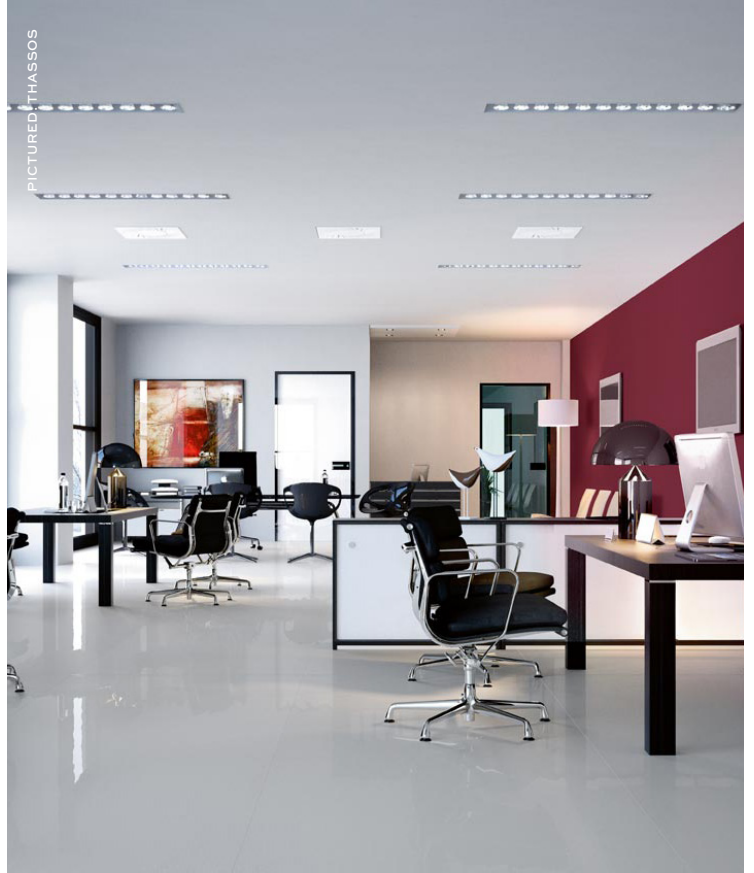

MAX FINE PORCELAIN

