

# CAPELLA VINYL · Type II

**RENEW**<sup>®</sup>  
eco-conscious  
Recycled Wall Surfaces


Photo:  
Wallcovering  
Capella ACW-52028 Briar #8

Upholstery  
Sofa: Dakota AC-69934 Truffle #15  
Drapery by Options<sup>®</sup> Studio


Arc-Com Wall Surfaces products  
are designed and colored to  
coordinate with the full spectrum  
of Arc-Com textile products for  
Upholstery, Drapery, Cubicle,  
and Panel applications.

Custom colors are available through  
the Options<sup>®</sup> Studio. Minimum  
yardage requirements apply.

Capella material shipped untrimmed.  
Red line indicates suggested trim line.  
For best installation double cutting on the wall is recommended.  
Straight across match / Non-Reverse hang – 54" finished width.

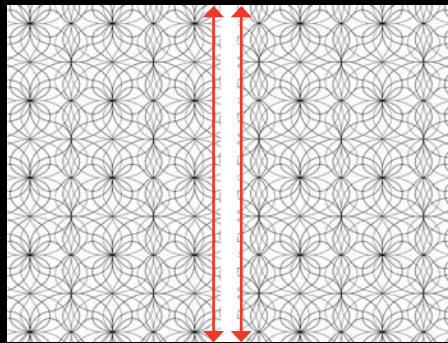

Capella shown with recommended trim line – 54" finished width.  
For best installation double cutting on the wall is recommended.

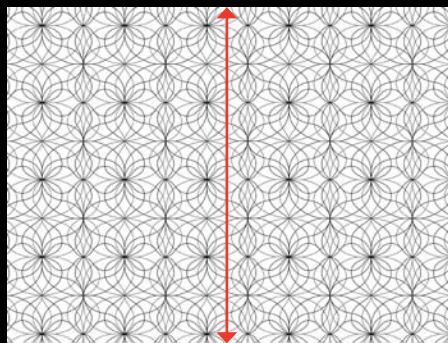

## PHYSICAL PROPERTIES:

<b>Width:</b> 54/55"	<b>Finished Width:</b> 54"
<b>Weight:</b> Type II, 20 oz/Lin. Yd. 626 Grams per Lin. Meter	<b>Backing:</b> Recycled Non-Woven (Contains Post Consumer Recycled Content)
<b>Tear Strength:</b> 34 x 25	<b>Tensile Strength:</b> 89 x 88
<b>Repeat:</b> Straight Across Match at 54" / Non-Reverse Hang 54" Horizontal / 12 5/8" Vertical Repeat	
<b>Fire Rated:</b> Class A / ASTM E-84-91 Tunnel Test NFPA Life Safety Code 101-6-5.3	

Flame Spread - 25\* Smoke Developed - 30\*

This test method is also published under the following designations:  
ANSI 2.5 NFPA 255 UBC 42-1 UL 723

\*The numerical flame spread rating referenced herein is not intended to reflect hazards presented by this or any other material under actual fire conditions. Arc-Com shall submit, upon request, a Certificate of Compliance that wallcoverings used meet specifications and modifications outlined herein.

- Federal Specifications:** Meets or exceeds requirements for Type II material for Federal Specifications CCC-W-408 A/C/D and W-101 WA Quality Standard for Polymer Coated Fabric Wallcovering. Tested in accordance with test procedures detailed in Federal Specification CCC-T-191A.
- LEED<sup>®</sup> Points:** Contains Post Consumer Recycled content contributes to LEED<sup>®</sup> Points (LEED<sup>®</sup> MR4). Can contribute to LEED<sup>®</sup> IEQ 4.1 for low-emitting materials, adhesives and sealants, if used with low VOC adhesives  
Backing made from rapidly renewable materials and wood pulp sourced from managed forests (LEED<sup>®</sup> MR 6,7).
- Quality Standards:** LOW IN VOC's / Printed with water based inks  
CALIFORNIA 01350 INDOOR AIR QUALITY - Low VOC emitting vinyl wallcoverings meets California Department of Health Services Standard 01350 requirements for office and school interiors (LEED<sup>®</sup> IEQ 4.6).  
STAIN AND MILDEW RESISTANCE - Best rating (0) as tested in accordance with G.S.A Federal Specification CCC-W-408 A/C/D.  
ANTI-MICROBIAL - All of our vinyl wallcoverings contain bactericide and mildew inhibitors to discourage the growth of mold and mildew under normal conditions.

## PERFORMANCE FEATURES:

- Composition:** Recycled Material - Contains Post Consumer Recycled Content.  
Free of Cadmium, Mercury and ozone-depleting chemicals.
- Permeability:** Vinyl wallcovering has little or no moisture permeability. If the design, construction or maintenance of a building and / or other circumstances allow moisture to accumulate in a wall or wall cavity, vinyl wallcovering can act as a vapor barrier restricting the escape of moisture and increasing the risk of mold growth. Mold and mildew are naturally occurring and are present everywhere in nature. They need only water and organic material (such as wood, paper or plant material) to feed upon and grow. Vinyl wallcovering permeability can be increased through perforation and alternative product constructions with varying degrees of increased permeability depending on methods used. No wallcovering material will prevent mold growth if moisture accumulation is permitted to occur. An experienced professional who is familiar with building conditions and circumstances should be consulted concerning benefits and limitations of vinyl wallcovering. Arc-Com Wallcoverings contain additives to resist mold and other micro-biological growth on the product. Those additives, however, will not prevent mold growth if moisture is allowed to accumulate behind the wall.  
For more information on wallcovering permeability and mold, Arc-Com recommends that you visit [www.wallcoverings.org](http://www.wallcoverings.org).
- Perforation/ Micro-Venting:** Vinyl wallcovering permeability can be increased through perforation/micro-venting, when installed with permeable wallcovering primer and adhesive. Perforation/Micro-venting is available on a custom order basis, 30 yard minimum quantity per color, at an additional cost.
- Metallics:** The environmental lighting of your installation may create a subtle gradation of color due to the light reflective quality of this design utilizing pearlescent and metallic inks.
- Warranty:** 5 Year Limited Warranty on Manufacturing Defects.
- Installation:** Detailed Arc-Com installation instructions are enclosed with each bolt.

To order a sample, to check stock / delivery, or to place an order, please call  
Arc-Com Headquarters or one of the Showrooms listed.

Copyright © 2012 Arc-Com Fabrics, Inc. All Rights Reserved.

MADE IN USA

**Showrooms:** Atlanta · Boston · Chicago · Dallas · Houston · Los Angeles · New York City · San Francisco  
Washington, DC

**International:** Australia · British Columbia · Calgary · Hong Kong · Mexico · Montréal · Taiwan · Toronto

**Arc-Com Fabrics, Inc.**  
33 Ramland South, Orangeburg, NY 10962  
1-800-223-5466 [www.arc-com.com](http://www.arc-com.com)



52021CD