

PART #

TL74


PROPRIETARY AND CONFIDENTIAL.

ALL DIMENSIONS HAVE A $\pm 1/16"$ TOLERANCE UNLESS OTHERWISE SPECIFIED. WE DO NOT RECOMMEND DRILLING OR CUTTING ANY HOLES BEFORE RECEIVING A PRODUCT OR A PRODUCT SAMPLE.

SPECIFICATIONS

- Weight capacity is 375 lbs. per leg.
- Table thickness is 25.40mm (1") MIN.
- Table Width is 900.00mm (35") MAX.
- Table length is 1600.00mm (63") MAX.

TABLE OF CONTENTS





..... 1X TL74




..... 10X Washer
(OPTIONAL)



..... 10X
M5 X 20.00mm
Wood Screw

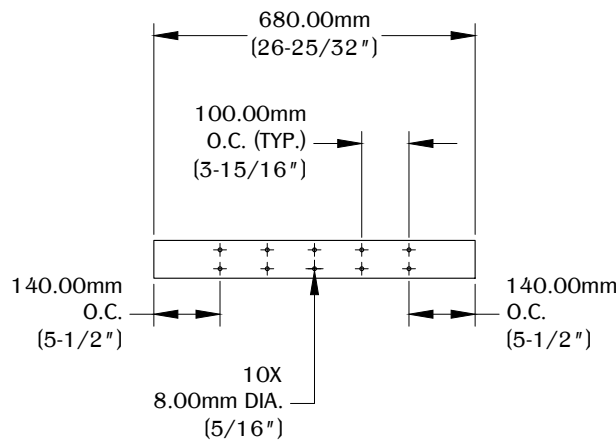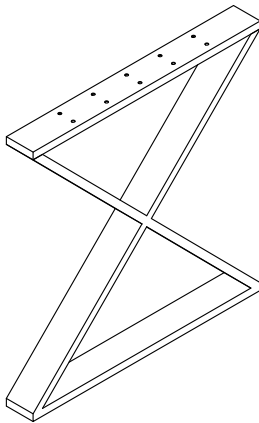


TOP VIEW

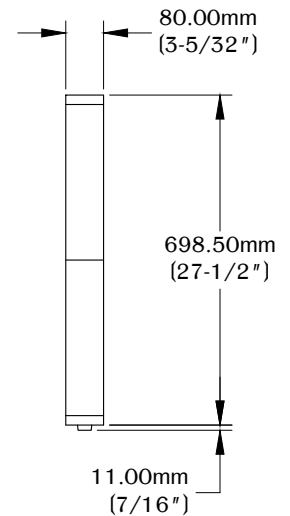


SIDE VIEW

1

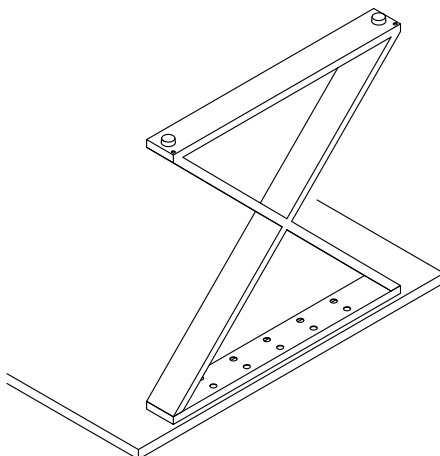

Determine the position and location of the part under the work surface.

2

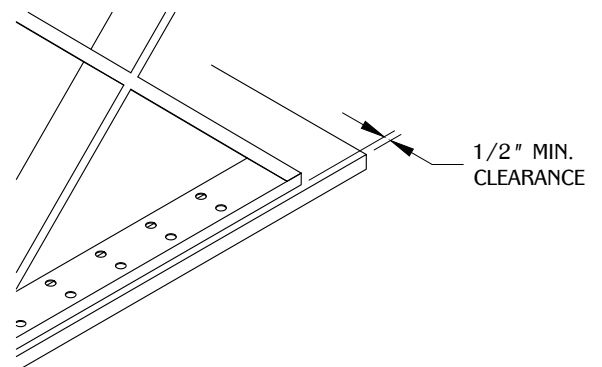

Allow 1/2" clearance at the edge of the work surface.


PART #

TL74

PROPRIETARY AND CONFIDENTIAL.


ALL DIMENSIONS HAVE A $\pm 1/16"$ TOLERANCE UNLESS OTHERWISE SPECIFIED. WE DO NOT RECOMMEND DRILLING OR CUTTING ANY HOLES BEFORE RECEIVING A PRODUCT OR A PRODUCT SAMPLE.

3

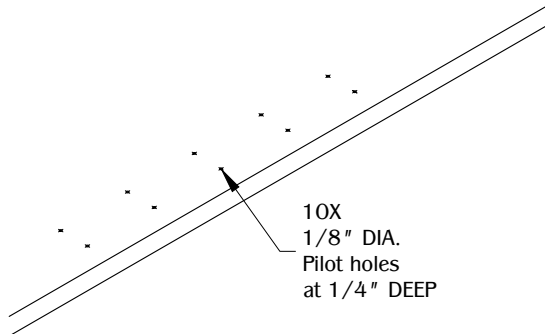


Mark the mounting position and drill 1/8" DIA. pilot holes for the mounting hardware.

4

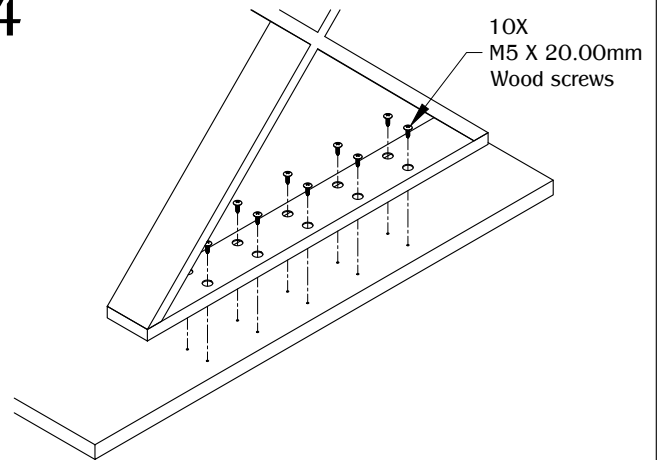

Align the mounting holes with the pilot holes and secure the part by using (10) M5 X 20.00mm wood screws. (Note: Washers are optional.)

5

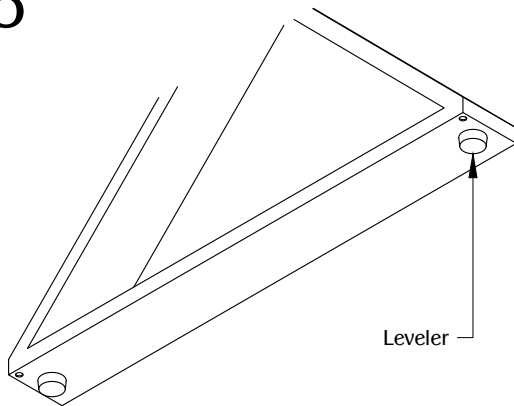

Adjust the levelers to the desired height.