

# **MEMOIRS**<sub>®</sub>

#### **Features**


- Acrylic
- Reinforced with fiberglass (FRP)
- Molded-in floor pattern
- Large footprint ideal for custom shower spaces
- Coordinating Memoirs<sub>®</sub> Suite
- 48" (122 cm) x 48" (122 cm) x 4-1/2" (11.4 cm)

## **Codes/Standards Applicable**

Specified model meets or exceeds the following:

ANSI Z124.2

48" (122 cm) ONE-PIECE ACRYLIC SHOWER RECEPTOR K-9567



#### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### Accessories:

- · CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

## **Specified Model**

Model	Description	Colors/Finishes		
K-9567	48" (122 cm) shower receptor	□ 0 White □ Other		
Recommen	ded Accessory			
K-9132	Shower drain	□ CP	□ PB	☐ Other

# **Product Specification**

The large-footprint one-piece shower receptor shall be 48" (122 cm) in length, 48" (122 cm) in width, and 4-1/2" (11.4 cm) in height. Shower receptor shall be made of acrylic reinforced with fiberglass (FRP). Receptor shall have molded-in floor pattern and be part of the coordinated Memoirs suite. Shower receptor shall be Kohler Model K-9567-\_\_\_\_\_.

# **MEMOIRS**<sub>®</sub>

### **Technical Information**

Fixture:	
Weight	55 lbs. (24.9 kg)
Drain hole	3-3/8" D. (8.6 cm)
Configuration	1-piece

### **Installation Notes**

Refer to installation instructions included with the fixture before beginning installation.


**IMPORTANT!** When installing this unit with Kohler Portico shower doors, the receptor will need to be recessed a minimum of 1/2" (1.3 cm) in from the water-resistant wall material to ensure proper door placement.

Shimming may be required to level the fixture.

Stud opening tolerance is + 1/4" (6 mm), - 0" (0 mm).

When fire rated construction is specified, dimensions are to the inside of the fire-rated wall.

Some shimming between stud frame and fixture may be required.

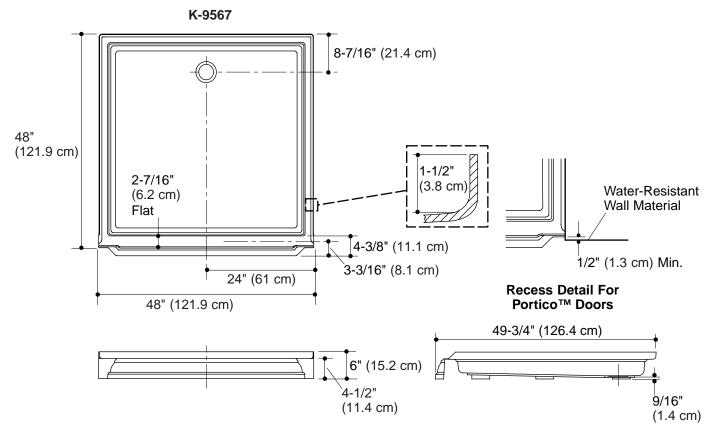

**Product Diagram** 

