

LEIGHTON_{TM}

Features

- · Vitreous china
- 12" (30.5 cm) rough-in
- 1.6 gpf (6 lpf)
- Combination toilet
- Concealed trapway
- Includes polished chrome trip lever
- Ingenium_® flushing system
- · Less seat and supply
- Elongated bowl
- 16-1/2" (41.9 cm) high bowl is ADA compliant when an open-front seat is installed
- 9-7/8" (25.1 cm) x 8-5/8" (21.9 cm) water area
- 30" (76.2 cm) x 19-1/4" (48.9 cm) x 31" (78.7 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ASME A112.19.2
- Energy Policy Act of 1992
- IAPMO/UPC
- CSA International
- CSA B45.0
- CSA B45.1
- ICC/ANSI A117.1

COMFORT HEIGHT™ TOILET K-3486

ADA



Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description Trip Leve		r Colors/Finishes	
K-3486	Elongated bowl toilet	left-hand	□ 0	□ Other
Recomm	ended Accessories			
K-4636	Cachet™ Quiet-Close™ elongated toilet seat		0	☐ Other
K-4650	Lustra™ open-front seat for ADA compliance		□ 0	☐ Other
K-7637	Angle supply with stop – 3/8" NPT	□ CP	□РВ	☐ Other
Optional	Accessories	·		<u> </u>
K-9461	Trip lever - non-CP	[⊒ PB	☐ Other

Product Specification

The elongated combination toilet shall be made of vitreous china. The toilet shall be 30" (76.2 cm) in length, 19-1/4" (48.9 cm) in width, and 31" (78.7 cm) in height with 9-7/8" (25.1 cm) x 8-5/8" (21.9 cm) water area. The toilet shall be 12" (30.5 cm) rough-in, and concealed trapway. The toilet shall be 1.6 gpf (6 lpf) with Ingenium flushing system. The toilet shall be ADA compliant with 16-1/2" (41.9 cm) high bowl when an open-front seat is installed. The toilet shall include polished chrome trip lever. The toilet shall be less seat and supply. The toilet shall be Kohler Model K-3486-______.

LEIGHTON_{TM}


Technical Information


Fixture:	
Configuration	two-piece, elongated
Water per flush	1.6 gal (6 L)
Passageway	2" (5.1 cm)
Water area	9-7/8" (25.1 cm) x 8-5/8" (21.9 cm)
Water depth from rim	5-1/2" (14 cm)
Seat post hole centers	5-1/2" (14 cm)

Included components:				
Bowl	K-4275			
Tank	K-4628			
Tank cover	1016946			
Trip lever	1022562			
Bolt cap accessory pack	1013092			

Installation Notes

Install this product according to the installation guide.

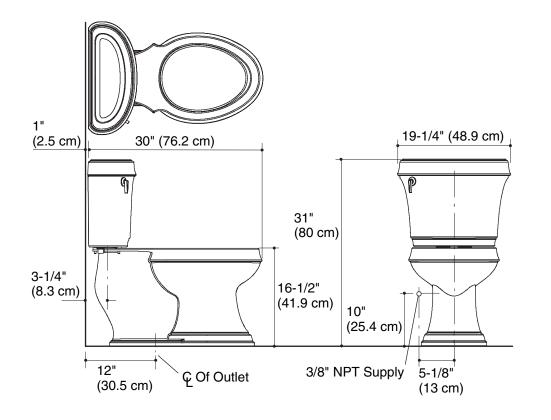



Product Diagram

