KOHLER®

CAXTON®

TILE-IN/METAL FRAME LAVATORY
K-2257
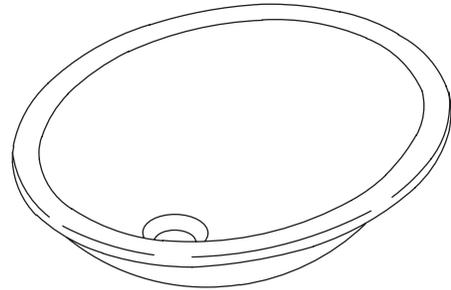
ADA

Features
- *Vitreous china*
- *Tile-in or metal frame installation*
- *With overflow*
- *ADA compliant*
- *Glazed rim for mounting with metal frame*
- *17″ (43.2 cm) x 14″ (35.6 cm)*

Codes/Standards Applicable
Specified model meets or exceeds the following:
- *ADA*
- *ASME A112.19.2*
- *IAPMO/UPC*
- *ICC/ANSI A117.1*
- *CSA B45.0*
- *CSA B45.1*
- *CSA International*

Colors/Finishes
- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories
- CP: Polished Chrome
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes	
K-2257	Tile-in or metal frame lavatory	❏ 0	❏ Other_____

Required Accessories for Metal Frame Installation			
K-6686	Metal frame		❏ NA

Recommended Accessories			
K-8998	P-Trap		❏ CP

Product Specification
The tile-in or metal frame lavatory shall be made of vitreous china. Lavatory shall be 17″ (43.2 cm) in length, and 14″ (35.6 cm) in width. Lavatory shall have overflow. Lavatory shall be ADA compliant. Lavatory features a glazed rim for metal frame mounting. Lavatory shall be Kohler Model K-2257-_____.
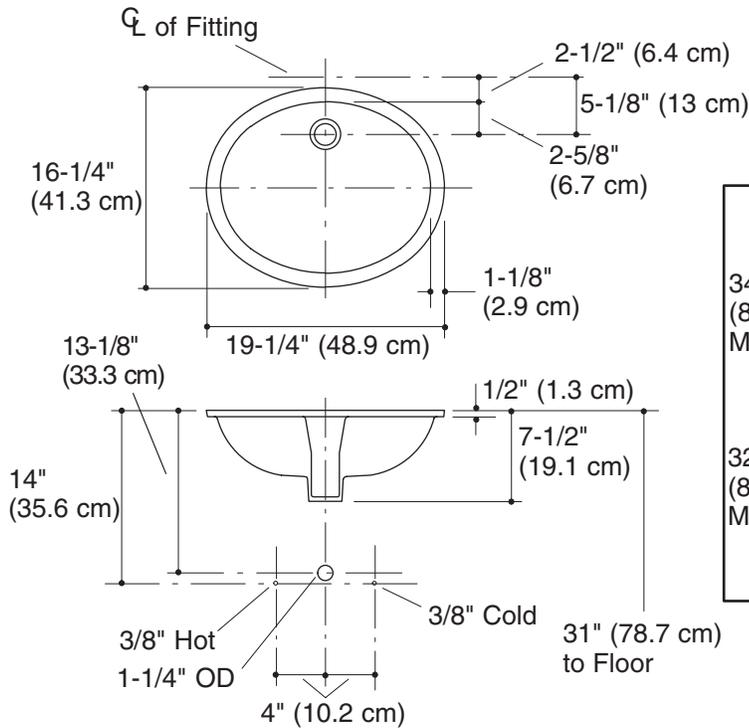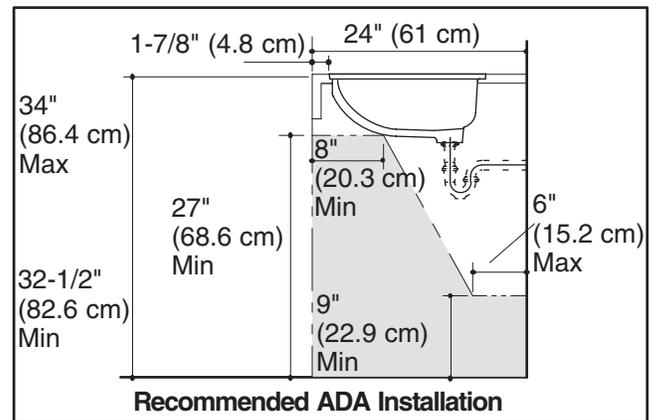
CAXTON®

Technical Information

Fixture*:	
Basin area	17″ (43.2 cm) x 14″ (35.6 cm)
Water depth	4″ (10.2 cm)
Drain hole	1-3/4″ (4.4 cm) D.
* Approximate measurements for comparison only.	

Included components:	
Cut-out template (Tile-in only)	114752-7

Installation Notes

Install this product according to the installation guide.

℄ of Fitting

2-1/2" (6.4 cm)

5-1/8" (13 cm)

2-5/8" (6.7 cm)

16-1/4" (41.3 cm)

1-1/8" (2.9 cm)

13-1/8" (33.3 cm)

19-1/4" (48.9 cm)

1/2" (1.3 cm)

7-1/2" (19.1 cm)

14" (35.6 cm)

3/8" Hot

3/8" Cold

1-1/4" OD

4" (10.2 cm)

31" (78.7 cm) to Floor

Standard Installation

1-7/8" (4.8 cm) 24" (61 cm)

34" (86.4 cm) Max

8" (20.3 cm) Min

27" (68.6 cm) Min

6" (15.2 cm) Max

32-1/2" (82.6 cm) Min

9" (22.9 cm) Min

Recommended ADA Installation

Product Diagram

THE BOLD LOOK
OF **KOHLER**®